

Volume 1 Issue 1

Online ISSN–Applied

January 2025

RNT JOURNAL OF NEW TRENDS IN SCIENCE

Published By: DEEKSHA CREATIONS SOCIETY

4, Jai Shree Colony, Near Dhulkot

Udaipur-313001 (Rajasthan)

Edited by Dr. S.N.A. Jaaffrey (Professor - Physics) &

Dr. Sunita Parihar (Asst. Professor - Biology)

RNT PG College

**RNT Group of Colleges, Behind Mataji Temple, State highway Road,
Kapasan District Chittorgarh, Rajasthan 312202**

Email - college@rntpgcollege.ac.in

A METHOD FOR SOLVING FUZZY TRANSPORTATION PROBLEM

Rinu Paliwal¹ Sapna Shrimali²

¹ Research Scholar, Department of Mathematics, Janardan Rai Nagar Rajasthan Vidyapeeth (Deemed to be University), Udaipur, Rajasthan, India

² Associate Professor, Department of Mathematics, Janardan Rai Nagar Rajasthan Vidyapeeth (Deemed to be University), Udaipur, Rajasthan, India

ABSTRACT: The most important and successful applications in the optimization refers to transportation problem. The main aspect of this paper is to find the least transportation cost of some commodities through a capacitated network when supply and demand of nodes and capacity and cost of edges are represented as fuzzy numbers. Here, we are solving the transportation problem using the Robust ranking technique, where fuzzy demand and supply are in the form of trapezoidal fuzzy numbers. The fuzzification of the cost of the transportation problem is discussed with the help of a numerical example.

KEY WORDS: Trapezoidal fuzzy numbers, Fuzzy transportation problem, Robust ranking technique.

1. Introduction

The transportation problem is one of the earliest applications of linear programming problems. Transportation models have wide applications in logistics and supply chain for reducing the cost effective algorithms have been developed for solving the transportation problem when the cost coefficients and supply and demand quantities are known exactly. The occurrence of randomness and imprecision in the real world is inevitable owing to some unexpected situations. There are cases that the cost coefficients and supply and demand quantities of a transportation problem may be uncertain due to some uncontrollable factors. To deal quantitatively with imprecise information in making decisions Bellman et.al.,[2] introduced the notion of fuzziness. Let a_i be the number of units of a product available at origin i and b_j be the number of units of the product required at destination j . Let C_{ij} be the cost of transporting one unit from origin i to destination j and let X_{ij} be the amount of quantity carried or shipped from origin i to destination j . There are effective algorithms for solving the transportation problems when all the decision parameters, i.e. the supply available at each source, demand required at each destination and unit transportation costs are given in a precise way. But in real life, there are many diverse situations

due to uncertainty in one or more decision parameters and hence they may not be expressed in a precise way. This is due to measurement inaccuracy, lack of evidence, computational errors, high information cost, weather conditions etc. Hence we cannot apply the traditional classical methods to solve the transportation problems successfully. Therefore the use of Fuzzy transportation problems is more appropriate to model and solve the real world problems. A fuzzy transportation problem is a transportation problem in which the transportation costs, supply and demand are fuzzy quantities.

Bellman and Zadeh [3] proposed the concept of decision making in Fuzzy environment. After this pioneering work, several authors such as Shiang-Tai Liu and Chiang Kao[16], Chanas et al[5], Pandian et.al [14], Liu and Kao [11] etc proposed different methods for the solution of Fuzzy transportation problems. Chanas and Kuchta [4] proposed the concept of the optimal solution for the Transportation with Fuzzy coefficient expressed as Fuzzy numbers. Chanas, Kolodziejczyk, Machaj[5] presented a Fuzzy linear programming model for solving Transportation problem. Liu and Kao [11] described a method to solve a Fuzzy Transportation problem based on extension principle. Lin introduced a genetic algorithm to solve Transportation with Fuzzy objective functions. Srinivasan [18] - [23] described the new methods to solve fuzzy transportation problem.

Nagoor Gani and Abdul Razak [13] obtained a fuzzy solution for a two stage cost minimizing fuzzy transportation problem in which supplies and demands are trapezoidal fuzzy numbers. A.Nagoor Gani, Edward Samuel and Anuradha [7] used Arshamkhan's Algorithm to solve a Fuzzy Transportation problem. Pandian and Natarajan [14] proposed a Fuzzy zero point method for finding a Fuzzy optimal solution for Fuzzy transportation problem where all parameters are trapezoidal fuzzy numbers.

2. PRELIMINARIES

In this section we define some basic definitions which will be used in this paper.

2.1 Definition – 1

The characteristic function $\mu_A(x)$ of a crisp set $A \subseteq X$ assigns a value either 0 or 1 to each

member in X . This function can be generalized to a function $\mu_A(x)$ such that

the value assigned to the element of the universal set X fall within a specified range

i.e. $\mu : X \rightarrow [0,1]$. The assigned value indicate the membership grade of the element in the set

A . The function $\mu_A(x)$ is called the membership function and the set

$\tilde{A} = \{(x, \mu_A(x)) : x \in A \text{ and } \mu_A(x) \in [0,1]\}$ is called a fuzzy set.

2.2 Definition – 2

A fuzzy set A , defined on the set of real numbers R is said to be a fuzzy number if its membership

function $\mu : R \rightarrow [0,1]$ has the following characteristics

(i) A is normal. It means that there exists an $x \in R$ such that $\mu(x) = 1$ $x_1, x_2 \in R$,

(ii) A is convex. It means that for every

$$\mu_A(\lambda x_1 + (1 - \lambda)x_2) \geq \min\{\mu_A(x_1), \mu_A(x_2)\}, \lambda \in [0,1]$$

(iii) μ_A is upper semi-continuous.

(iv) $\text{supp}(A)$ is bounded in R .

2.3 Definition – 3

A fuzzy number A is said to be non-negative fuzzy number if and only if $\mu(x) = 0, \forall x < 0$

2.4 Definition – 4

A fuzzy number $\tilde{A} = (a, b, c, d)$ is said to be a trapezoidal fuzzy number

if its membership function is given by, where $a \leq b \leq c \leq d$.

$$\mu_{\tilde{A}}(x) = \begin{cases} 0, & x < a \\ \frac{x-a}{b-a}, & a < x \leq b, \\ 1, & b < x < c, \\ \frac{d-x}{d-c}, & c \leq x < d, \\ 0, & x > d \end{cases}$$

2.5 Definition – 5

A trapezoidal fuzzy number $\tilde{A} = (a, b, c, d)$ is said to be non-negative (non - positive)

trapezoidal fuzzy number. i.e. $\tilde{A} \geq 0$ ($\tilde{A} \leq 0$) if and only if $a \geq 0$ ($c \leq 0$). A trapezoidal fuzzy

number is said to be positive (negative) trapezoidal fuzzy number i.e. $\tilde{A} > 0$ ($\tilde{A} < 0$) if and

only if $a > 0$ ($c < 0$).

2.6 Definition – 6

Two trapezoidal fuzzy number $\tilde{A}_1 = (a, b, c, d)$ and $\tilde{A}_2 = (e, f, g, h)$ are said to be

equal. i.e. $\tilde{A}_1 = \tilde{A}_2$ if and only if $a=e, b=f, c=g, d=h$.

2.7 Definition – 7

Let $\tilde{A}_1 = (a, b, c, d)$ and $\tilde{A}_2 = (e, f, g, h)$ be two non-negative trapezoidal fuzzy number then

- (i) $\tilde{A}_1 \oplus \tilde{A}_2 = (a, b, c, d) \oplus (e, f, g, h) = (a+e, b+f, c+g, d+h)$
- (ii) $\tilde{A}_1 \ominus \tilde{A}_2 = (a, b, c, d) \ominus (e, f, g, h) = (a-h, b-g, c-f, d-e)$
- (iii) $\tilde{-A}_1 = -(a, b, c, d) = (-d, -c, -b, -a)$
- (iv) $\tilde{A}_1 \otimes \tilde{A}_2 = (a, b, c, d) \otimes (e, f, g, h) = (ae, bf, cg, dh)$
- (v) $\tilde{A}_1^{-1} \cong \frac{1}{a}, \frac{1}{b}, \frac{1}{c}, \frac{1}{d}$

2.8 Rou bast Ranking Technique

Rou bast ranking technique which satisfy compensation, linearity, and additivity properties and provides results which are consist of human intuition. If \tilde{a} is a fuzzy number then the

Rou bast ranking is defined by $R(\tilde{a}) = \int_0^1 0.5(a_\alpha^L, a_\alpha^U) d\alpha$, Where (a_α^L, a_α^U) is the α level cut of the fuzzy number \tilde{a} and $(a_\alpha^L, a_\alpha^U) = \{((b-a)+a), (d-(d-c))\}$

In this paper we use this method for ranking the objective values. The Rou bast ranking index

$R(\tilde{a})$ gives the representative value of fuzzy number \tilde{a} .

Mathematical formulation of a fuzzy transportation problem

Mathematically a transportation problem can be stated as follows:

Minimize

$$z = \sum_{i=1}^m \sum_{j=1}^n c_{ij} x_{ij} \tag{1}$$

Subject to

$$\left. \begin{aligned} \sum_{j=1}^n x_{ij} &= a_i & j=1,2,\dots,n \\ \sum_{i=1}^m x_{ij} &= b_j & i=1,2,\dots,m \\ x_{ij} &\geq 0 & i=1,2,\dots,m, j=1,2,\dots,n \end{aligned} \right\} \tag{2}$$

Where c is the cost of transportation of an unit from the i^{th} source to the j^{th} destination, and the quantity x_{ij} is to be some positive integer or zero, which is to be transported from the

i^{th} origin to j^{th} destination. A obvious necessary and sufficient condition for the linear

In which the transportation costs c_{ij} , supply a_i and demand b_j quantities are fuzzy quantities. An obvious necessary and sufficient condition for the fuzzy linear programming problem give in (4-5) to have a solution is that

$$\sum_{i=1}^n a_i = \sum_{j=1}^m b_j \quad \dots \dots \dots (6)$$

This problem can also be represented as follows:

	1	n	Supply
1	\tilde{c}_{11}	\tilde{c}_{1n}	a_1
.
.
.
.
M	\tilde{c}_{m1}	\tilde{c}_{mn}	a_m
Demand	\tilde{b}_1	\tilde{b}_n	

3. Alternate Method for Solving Transportation Problem

Following are the steps for solving Transportation Problem

Step – 1: From the given Transportation problem, convert fuzzy values to crisp values using ranking function.

Step – 2: Deduct the minimum cell cost from each of the cell cost of every row/column of the Transportation problem and place them on the right-top/right-bottom of corresponding cost.

Step – 3: Adding the cost of right-top and right – bottom and place the summation value in the corresponding cell cost.

Step – 4: Identify the minimum element in each row and column of the Transportation table and subtract on their corresponding the row and the column.

Step – 5: Find the sum of the values in the row and the column. Choose the maximum value and

allocate the minimum of supply/demand in the minimum element of the row and column. Eliminate by deleting the columns or rows corresponding to where the supply or demand is satisfied.

Step – 6: Continue step -4 and step -5 until of all the supply and demand is met. Step – 7: Place the original transportation cost to satisfied cell cost.

Step – 8: Calculate the minimum cost.

That is,

$$\text{Total Cost} = \sum \sum C_{ij} X_{ij}$$

4. Numerical Example

Consider the Fuzzy Transportation Problem

	FD1	FD2	FD3	FD4	Fuzzy Capacity
FO1	[1,2,3,4]	[1,3,4,6]	[9,11,12,14]	[5,7,8,11]	[1,6,7,12]
FO2	[0,1,2,4]	[-1,0,1,2]	[5,6,7,8]	[0,1,2,3]	[0,1,2,3]
FO3	[3,5,6,8]	[5,8,9,12]	[12,15,16,19]	[7,9,10,12]	[5,10,12,17]
Fuzzy Demand	[5,7,8,10]	[1,5,6,10]	[1,3,4,6]	[1,2,3,4]	

Solution

In Conformation to model the fuzzy transportation problem can be formulated in the following mathematical programming form

$$\begin{aligned} \text{Min } Z = & R(1,2,3,4)x_{11} + R(1,3,4,6)x_{12} + R(9,11,12,14)x_{13} + R(5,7,8,11)x_{14} \\ & +R(0,1,2,4)x_{21}+R(-1,0,1,2)x_{22}+R(5,6,7,8)x_{23}+R(4,5,6,7)x_{24}+R(3,5,6,8)x_{31}+R(5,8,9,12)x_{32} \\ & +R(12,15,16,19)x_{33} + R(7,9,10,12)x_{34} \end{aligned}$$

$$R(\tilde{a}) = \int_0^1 0.5(a^L_{\alpha} \ a^U_{\alpha})d\alpha$$

where $(a^L_{\alpha}, a^U_{\alpha}) = \{((b-a)+\alpha), (d-(d-c))\}$

After applying ranking technique, we get

Table -1

	D1	D2	D3	D4	Supply
O1	2.5	3.5	11.5	7.75	6.5
O2	1.75	0.5	6.5	1.5	1.5
O3	5.5	8.5	15.5	9.5	11
Demand	7.5	5.5	3.5	2.5	

Table – 2

	D1	D2	D3	D4	Supply
O1	2.5^0_0	3.5^1_3	11.5^9_5	$7.75^{5.25}_{6.25}$	6.5
O2	$1.75^{1.25}_{0.75}$	$.5^0_0$	6.5^6_0	1.5^1_0	1.5
O3	5.5^0_3	8.5^3_8	15.5^{10}_9	9.5^4_8	11
Demand	7.5	5.5	3.5	2.5	

Table – 3

	D1	D2	D3	D4	Supply
O1	0	4	14	11.5	6.5
O2	2	0	6	1	1.5
O3	3	11	19	12	11
Demand	7.5	5.5	3.5	2.5	

With the help of the method, we get

Table – 4

	D1	D2	D3	D4	Supply
O1	0	5.5	1	11.5	6.5
		4	14		
O2	2	0	1.5	1	1.5
			6		
O3	7.5	11	1	2.5	11
	3		19	12	
Demand	7.5	5.5	3.5	2.5	

Finally, we get

Table – 5

	D1	D2	D3	D4	Supply
O1		5.5	1		6.5
		3.5	11.5		
O2			1.5		1.5
			6.5		
O3	7.5		1	2.5	11
	5.5		15.5	9.5	
Demand	7.5	5.5	3.5	2.5	

Hence $(4+3-1)=6$ cells are allocated and hence we got our feasible so In next we calculate total cost and its corresponding allocated value of supply and demand

$$\text{Total Cost } (5.5 \times 7.5) + (3.5 \times 5.5) + (11.5 \times 1) + (6.5 \times 1.5) + (15.5 \times 1) + (9.5 \times 2.5) = 121$$

This is a basic feasible solution. The solution obtained using NCM, LCM, VAM and MODI/Stepping stone methods respectively. Hence the basic feasible solution obtained from method is optional soln.

5. Conclusion

In this paper, the transportation costs are considered as imprecise numbers described by fuzzy numbers which are more realistic and general in nature. Moreover, the fuzzy transportation problem of trapezoidal fuzzy numbers has been transformed into crisp transportation problem using robust ranking technique indices. Numerical examples show that by this method we can have the optimal solution as well as the crisp and fuzzy optimal total cost. By using Robust ranking method we have shown that the total cost obtained is optimal. Hence, this will be helpful for decision makers who are handling logistic and supply chain problems in fuzzy environment. For future research we propose effective implementation of the trapezoidal fuzzy numbers in all fuzzy problems.

6. References

- [1] Arsham H and A. B. Kahn, A simplex type algorithm for general transportation problems: An alternative to stepping-stone, Journal of Operational Research Society, 40 (1989), 581- 590.
- [2] Basirzadeh.H, An approach for solving fuzzy transportation problem, Appl. Math. Sci. 5 (2011) 1549-1566
- [3] Bellman,R.E. and L.A. Zadeh.1970."Decision Making in a Fuzzy Environment," Management Science, 17,141-164.
- [4] Chanas S, D. Kuchta, A concept of optimal solution of the transportation with Fuzzy cost co efficient, Fuzzy sets and systems, 82(9) (1996), 299-305.
- [5] Chanas S, W. Kolodziejczyk and A. Machaj, A fuzzy approach to the transportation problem, Fuzzy Sets and Systems, 13(1984), 211-221.
- [6] De P K and Yadav B, Approach to defuzzify the triangular fuzzy number in transportation problem. Internat. J. Comput. Cognit. 8: (2010)64–67

- [7] Edward Samuel and A. NagoorGani, Simplex type algorithm for solving fuzzy transportation problem, Tamsui oxford journal of information and mathematical sciences, 27(1) (2011), 89-98.
- [8] Gass, On solving the transportation problem, Journal of operational research Society, 41 (1990), 291-297.
- [9] Kaur A and Kumar A, A new method for solving fuzzy transportation problems using ranking function. Appl. Math. Model. 35: (2011)5652–5661
- [10] Lious.T.S. and Wang.M.J, Ranking fuzzy numbers with integral value, Fuzzy sets and systems, 50 (3) (1992), 247-255.
- [11] Liu. S.T, Kao.C, Solving Fuzzy transportation problem based on extension principle, European Journal of Operations Research, 153 (2004), 661-674.
- [12] Manimaran.S and Ananthanarayanan.M, A study on comparison between fuzzy assignment problems using triangular fuzzy numbers with average method, IJST, Vol.5, No.4, April 2012, 2610-2613.
- [13] NagoorGani, K. A. Razak, Two stage fuzzy transportation problem, Journal of Physical Sciences, 10 (2006), 63–69.
- [14] Pandian P and Natrajan G, An optimal more-for-less solution to fuzzy transportation problems with mixed constraints. Appl. Math. Sci. 4(2010) 1405–1415
- [15] Pandian. P and Nagarajan. G, A new algorithm for finding a fuzzy optimal solution for fuzzy transportation problem, Applied Mathematics Sciences, 4 (2) (2010),79-90
- [16] Shiang-Tai Liu and Chiang Kao, Solving fuzzy transportation problems based on extension principle, Journal of Physical Science, 10 (2006), 63-69.
- [17] Shiv Kant Kumar, InduBhusan Lal and Varma. S. P, An alternative method for obtaining initial feasible solution to a transportation problem and test for optimality, International journal for computer sciences and communications, 2(2) (2011),455-457.
- [18] Srinivasan R and Muruganandam. S, „A New Algorithm for Solving Fuzzy Transportation Problem with Trapezoidal Fuzzy Numbers“, International Journal of Recent Trends in Engineering and Research, 2 (3) (2016), pp. 428 – 437.
- [19] Srinivasan. R, „Modified Method for Solving Fully Fuzzy Transportation Problem“, Global Journal of Research Analysis, 5(4) (2016), pp. 177 – 179.
- [20] Srinivasan. R and Muruganandam.S, „A New Approach for Solving Unbalanced Fuzzy Transportation Problem“, Asian Journal of Research in Social Sciences and Humanities, 6 (5) (2016), pp. 673-680.
- [21] Srinivasan. R and Muruganandam.S, „Optimal Solution for Multi-Objective Two Stage

Fuzzy Transportation Problem”, Asian Journal of Research in Social Sciences and Humanities, 6(5) (2016), pp. 744-752.

[22] Srinivasan. R and Muruganandam.S, „A Method of Solution to Intuitionistic Fuzzy Transportation Problem”, Asian Journal of Research in Social Sciences and Humanities, 6 (5) (2016), pp. 753-761.

[23] Srinivasan. R, Muruganandam. S and Vijayan. V, „A New Algorithm for Solving Fuzzy Transportation Problem with Triangular Fuzzy Number”, Asian Journal of Information Technology, 15 (18) (2016), pp. 3501-3505.

[24] Tanaka, H. Ichihashi and K. Asai, A formulation of fuzzy linear programming based on comparison of fuzzy numbers, Control and Cybernetics, 13 (1984), 185-194.

[25] Yager. R.R, “A procedure for ordering fuzzy subsets of the unit interval”, Information sciences, 24 (1981), 143 – 161.

[26] Zadeh L. A., Fuzzy sets, Information Control, 8 (1965), 338-353.

[27] Zimmermann H. J., Fuzzy programming and linear programming with several objective functions, fuzzy sets and systems, 1 (1978), 45-55.

[28] Zimmermann H. J., Fuzzy Set Theory and Its Applications, Kluwer Academic, Norwell.MA, 1991.

Reliability Measures of Hybrid Electric Vehicles (HEVs) and Plug in Hybrid Electric Vehicles (PHEVs)

Hemlata Thakur¹, Pradeep K. Joshi², Chitaranjan Sharma³, S.K.Tiwari⁴

¹ Department of Mathematics, Govt. College Rau, Indore, India

² Department of Mathematics, IPS Academy, Indore India

³ Department of Mathematics, Govt. Holkar Science College, Indore, India

⁴ Department of Mathematics, School of Mathematics, Vikram University, Ujjain, India

Corresponding author email: pradeepkjoshi1@gmail.com

Abstract

This study deals with the analysis of availability and reliability of hybrid electric vehicles (system 1) and plug-in hybrid electric vehicles (system 2). The purpose of this study is to find out the opinion of consumers who can afford their own hybrid car. The distribution of failure and repair rates is assumed to be exponential. A method of linear differential equations (LDE) is used to estimate reliability metrics such as average system failure and steady-state availability. Some special cases were evaluated using different values of the failure rates. In addition, we examined how the failure rate affected the system performances measures and we demonstrated the basic involved concept comparing the results of both systems. The results are also presented graphically using MATLAB software.

Keywords: Reliability, Steady -State Availability, Linear Differential Equation, Mean Time to System Failure(MTSF).

1. Introduction

In the subject of system reliability, a number of authors analyzed and assessed reliability matrices, including MTSF, steady-state availability, busy period of repairmen, and cost analysis with the Markov renewal process using regeneration point approach. In this work, dependability measures are assessed using linear differential equations technique. This approach is less complicated than the others, and MATLAB software can be used to carry out computations. Many authors previously employed linear differential equations techniques to evaluate reliability measures for various systems. The availability analysis and reliability measure of two non-identical systems were examined by El-Said et al. using the linear differential equation [1]. El.sherbeny at analysed the behaviour of some industrial systems in light of the cost-free warranty policy [2]. Gupta and Mittal investigated the stochastic behaviour of a two-unit warm standby system with two types of repairmen and varying levels of patience time [3]. Mokaddies et al. assessed the reliability and availability of two dissimilar-unit cold standby systems with three modes using a linear differential equation with no cost-benefit analysis [4]. Gao at el Studied a K -out-of $M+W+C$: G mixed standby system with an unreliable repair facility [5]. Uba Ahmad Ali et al. evaluated the dependability of a two different unit cold standby system with three modes using the Kolmogorov Forward equation approach [6]. Yusuf, I.et. al. studied Stochastic Modeling and performance measures of redundant system operating in different conditions[9]. Pradeep K. Joshi et al discussed the dependability and

availability of a two-unit standby redundancy system using the linear differential equation solution technique [7]. Lane et. al. analysed data from a survey of drivers ($n = 1080$) administered in late 2013 to assess factors that influence potential car buyers to consider two different types of plug-in electric vehicles (PEVs) in the United States: plug-in hybrid electric vehicles (PHEVs) and battery electric vehicles (BEVs) [8]. The goal of this study is to investigate the dependability matrices, such as MTSF and steady state availability analysis, of a hybrid four-wheeler (system 1) and plug-in hybrid four-wheeler (system 2) using linear differential equation technique. Plug-in hybrid four-wheeler (System 2) is superior to hybrid four-wheeler (System 1) based on the computation presented in the study regarding the influence of the battery charging option and switching. A graphical representation of measures of system effectiveness of both the system is also explored.

2. Model Description and Assumptions

In this work, two types of electrical vehicles were studied: hybrid electric vehicles (system 1) and plug-in hybrid electric vehicles (system 2).

2.1 Hybrid Electric Vehicle: Hybrid electric vehicles are powered by an internal combustion engine and an electric motor which uses energy stored in batteries. A hybrid electric vehicle cannot be plugged in to charge the battery.

2.2 Plug in Hybrid Electric Vehicle: Plug in hybrid electric vehicle use batteries to power an electric motor, as well as another fuel such as gasoline or diesel to power an internal combustion engine or other propulsion sources. PHEV can charge their batteries through charging equipment and regenerative braking.

Throughout the study of research paper, the following assumptions has been made:

- System 1 (HEV) can generate electricity through regenerative braking rather than by plugging into a charging station to recharge the vehicle's battery.
- The hybrid four-wheeler in system 1 continues to run even if the battery failed.
- System 2 (PHEV) will only use its internal combustion engine as a backup and will be primarily driven by an electric motor.
- The switch in system 2 (PHEV) is utilized to turn on the petrol supply.
- System 2 (PHEV) uses an automatic switch to start the engine immediately when the battery dies (fails), provided the switch is in working order at the time of need; otherwise, the engine won't start until the switch is repaired.
- System 1 has only two modes, namely failure and normal.
- System 2 has three operating modes: normal, partial, and failure.
- Repair is flawless (as good as new)
- Only one change may be made at a time in a single state.

- All failure rates and repair rates are constant.
- Failure and repair rates are followed by an exponential distribution.

3 Notation and Symbol

S_i : Transition state of the system , $i = 0, 1, 2, 3, 4$

P_N –Petrol supply Normal

B_N –Battery fully charged

B_{NP} –Battery partially charged

P_{NP} –Petrol supply is partially

B_F –Battery failed.

P_F –Petrol supply failed.

α –failure rate of petrol supply

β - failure rate of battery

α' -failure rate of petrol when battery already failed

β' -failure rate of battery when petrol already failed.

δ –Repair rate of Petrol supply

λ –Repair rate of battery

δ_1 –rate of charging battery

α_2 –rate of completion of battery charging

α_1 –rate of filling petrol

μ_1 –rate of completion of filling petrol

θ –replacement rate of both petrol & battery

4 Transition probability of Hybrid Electric Vehicle (System 1)

Figure 1 shows the transition probability of different states of system 1.

Up State ; $S_0 \equiv (B_N, P_N)$, $S_1 \equiv (B_N, P_F)$, $S_2 \equiv (B_F, P_N)$

Down State ; $S_3 \equiv (B_F, P_F)$

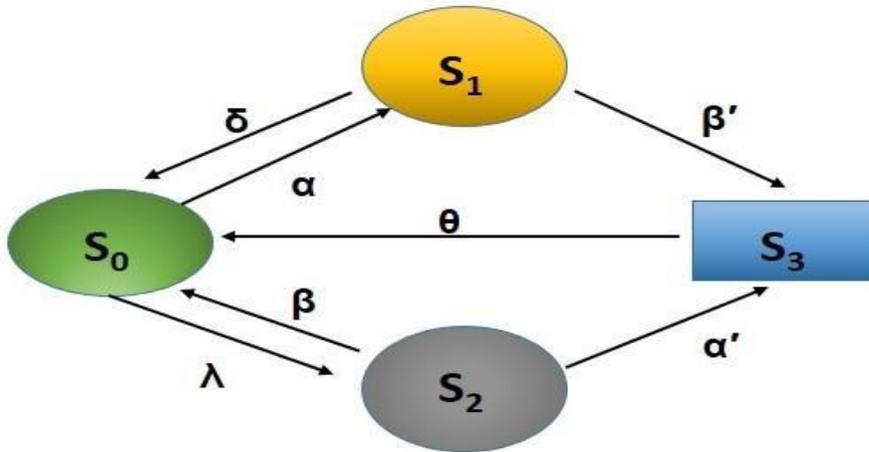


Figure 1. State Transition Diagram for the system1

5 Measures of System Effectiveness of System 1

5.1 Mean time to system failure (MTSF).

By applying linear differential equation technique and above assumptions, the mean time to system failure (MTSF) of the proposed system is determined. Define $P_i(t)$ as the probability that the system is in state S_i at time t , based on Figure 1. Let $P(t)$ represent the probability row vector at time t . Consider the initial conditions as :

$$P(0) = [P_0(0), P_1(0), P_2(0), P_3(0)], = [1, 0, 0, 0] \tag{1} \quad \text{The}$$

derived system of differential equations is as follows :

$$(dp_0(t))/dt = -(\alpha+\beta) P_0(t) + \delta P_1(t) + \lambda P_2(t) + \theta P_3(t)$$

$$(dp_1(t))/dt = -(\beta' + \delta) P_1(t) + \alpha P_0(t)$$

$$(dp_2(t))/dt = -(\alpha' + \lambda) P_2(t) + \beta P_0(t)$$

$$(dp_3(t))/dt = -\theta P_3(t) + \beta' P_1(t) + \alpha' P_2(t)$$

which can be expressed in matrix form as

$$\frac{dp(t)}{dt} = A P \tag{2}$$

where

$$A = \begin{bmatrix} -(\alpha + \beta) & \delta & \lambda & \theta \\ \alpha & -(\beta' + \delta) & 0 & 0 \\ \beta & 0 & -(\alpha' + \lambda) & 0 \\ 0 & \beta' & \alpha' & -\theta \end{bmatrix}$$

We eliminate the rows and columns of the absorption state of the matrix A and transpose it to create a new matrix called Q because evaluating the transition solution is difficult. The expected time to reach an absorbing state is determined from

$$E[T_{P(0) \rightarrow (absorbing)}] = P(0) \int_0^{\infty} e^{Qt} dt$$

and

$$\int_0^{\infty} e^{Qt} dt = -Q^{-1}, \text{ since } Q^{-1} < 0$$

where

$$Q = \begin{bmatrix} -(\alpha + \beta) & \alpha & \beta & \delta & 0 & 0 & 0 \\ 0 & -(\beta' + \delta) & 0 & \lambda & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & -(\alpha' + \lambda) & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & -\theta & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & -\theta \end{bmatrix}$$

The MTSF can be expressed explicitly as:

$$MTSF_1 = E[TP(0) \rightarrow (absorbing)] = P(0)(-Q^{-1})[1 \ 1 \ 1 \ 1] \tag{3}$$

$$MTSF_1 = \frac{(\alpha + \beta_1)(\lambda + \alpha) + \delta(\lambda + \alpha) + \beta(\delta + \beta)}{\alpha\beta(\lambda + \alpha) + \beta\alpha(\delta + \beta)} \tag{4}$$

5.2 Steady -State Availability Analysis of the System 1

The initial condition for the availability analysis in Figure 1 is the same as for the reliability case.

$$P(0) = [P_0(0), P_1(0), P_2(0), P_3(0)] = [1, 0, 0, 0]$$

The system of differential equations can be expressed as:

$$\dot{P} = A P$$

$$\begin{bmatrix} \dot{p}_0 \\ \dot{p}_1 \\ \dot{p}_2 \\ \dot{p}_3 \end{bmatrix} = \begin{bmatrix} -(\alpha + \beta) & \delta & \lambda & \theta & \alpha & 0 & 0 & 0 \\ 0 & -(\beta' + \delta) & 0 & 0 & \beta & 0 & 0 & 0 \\ 0 & 0 & -(\alpha' + \lambda) & 0 & 0 & \beta' & \alpha' & \theta \\ 0 & 0 & 0 & -\theta & 0 & 0 & 0 & -\theta \end{bmatrix} \begin{bmatrix} P_0 \\ P_1 \\ P_2 \\ P_3 \end{bmatrix}$$

The steady-state availability is given by

$$A_{T_1}(\infty) = 1 - P_3(\infty) \quad (5)$$

In the steady - state availability,the derivatives of the state probabilities become zero so that

$$A P(\infty) = 0 \quad (6)$$

which is in matrix form

$$\begin{bmatrix} -(\alpha + \beta) & \delta & \lambda & \theta & \alpha & -(\beta' + \delta) & 0 & 0 & \beta & 0 & -(\alpha' + \alpha) & 0 & 0 & \beta' & \alpha' & \theta \end{bmatrix} \begin{bmatrix} P_0(\infty) \\ P_1(\infty) \\ P_2(\infty) \\ P_3(\infty) \end{bmatrix} = \begin{bmatrix} 0 \\ 0 \\ 0 \\ 0 \end{bmatrix} \quad (7)$$

$$P_0(\infty) + p_1(\infty) + P_2(\infty) + p_3(\infty) = 1 \quad (8)$$

To get $P_3(\infty)$ we substitute (8) in one of the redundant rows of (7) and use MATLAB to obtain the solution of the following system of linear equations in matrix form

$$\begin{bmatrix} -(\alpha + \beta) & \delta & \lambda & \theta & \alpha & -(\beta' + \delta) & 0 & 0 & \beta & 0 & -(\alpha + 1) & 0 & 1 & 1 & 1 & 1 \end{bmatrix} \begin{bmatrix} P_0(\infty) \\ P_1(\infty) \\ P_2(\infty) \\ P_3(\infty) \end{bmatrix} = \begin{bmatrix} 0 \\ 0 \\ 0 \\ 1 \end{bmatrix} \quad (9)$$

The solution of (9) provides the steady - state availability for Figure 1. The explicit expression for $AT_1(\infty)$ is :

$$A_{T_1}(\infty) = \frac{\alpha(\alpha+\lambda)(\beta+\theta)+(\beta+\delta)(\alpha\beta+\theta\lambda)+\theta(\alpha\beta'+\alpha\delta)}{\alpha(\alpha+\lambda)(\beta+\theta)+(\beta+\delta)[\beta(\alpha+\theta)+\theta(\alpha+\lambda)]} \quad (10)$$

6. Transition probability of Plug- in hybrid electric vehicle(System 2)

Figure2 shows the transition probability of different states of system 2.

Up State ; $S_0 \equiv (B_N, P_N)$, $S_1 \equiv (B_{NP}, P_N)$, $S_2 \equiv (B_N, P_{NP})$, $S_3 \equiv (B_N, P_F)$, $S_4 \equiv (B_F, P_N)$

Down State $S_5 \equiv (B_F, P_F)$

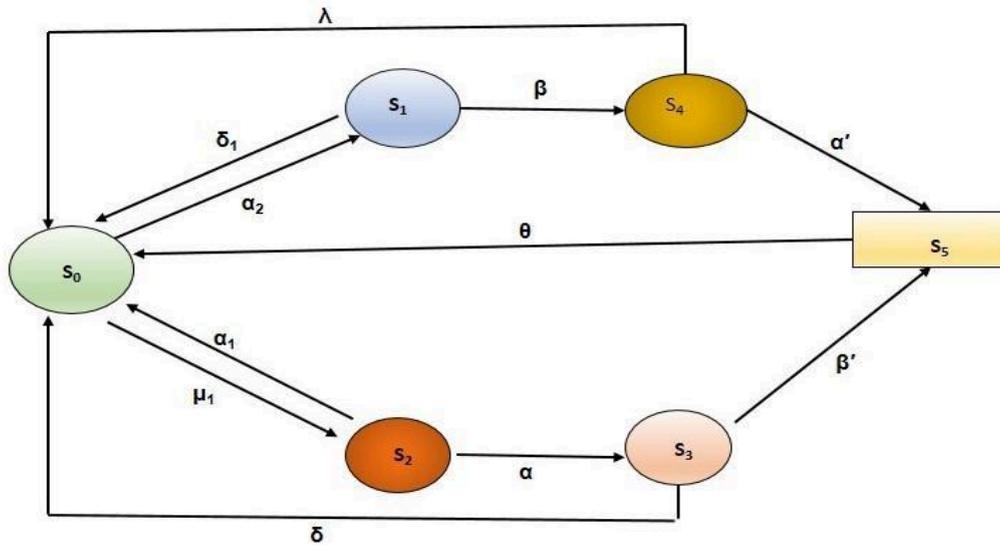


Figure 2; State transition diagram for the Second system

7 Measures of System Effectiveness of System 2

7.1 Mean Time to System Failure

By applying the linear differential equation technique and the above assumptions, the mean time to system failure (MTSF) of the proposed system is determined. Define $P_i(t)$ as the probability that the system is in state S_i at time t , based on Figure 2. Let $P(t)$ represent the probability row vector at time t . Consider the initial conditions as :

By applying the linear differential equation technique and the aforementioned assumptions, the mean time to system failure (MTSF) of the suggested system is determined. Define $P_i(t)$ as the probability that the system will be in state S_i at time t based on Figure 2. Let $P(t)$ represent the probability row vector at time t . Consider the initial conditions as :

$$P(0) = [P_0(0), P_1(0), P_2(0), P_3(0), P_4(0), P_5(0)] = [1, 0, 0, 0, 0, 0] \tag{11}$$

The derived system of differential equations is as follows:

$$\frac{dp_0(t)}{dt} = -(\alpha_2 + \alpha_1) P_0(t) + \delta_1 P_1(t) + \mu_1 P_2(t) + \delta P_3(t) + \lambda P_4(t) + \theta P_5(t)$$

$$\frac{dp_1(t)}{dt} = -(\beta + \delta_1) p_1(t) + \alpha_2 P_0(t)$$

$$\frac{dP_2(t)}{dt} = -(\alpha + \mu_1) P_2(t) + \alpha_1 P_0(t)$$

$$\frac{dP_3(t)}{dt} = -(\beta' + \delta)P_3(t) + \alpha P_2(t)$$

$$\frac{dP_4(t)}{dt} = -(\lambda + \alpha)P_4(t) + \beta P_1(t)$$

$$\frac{dP_5(t)}{dt} = -\theta P_5(t) + \beta' P_3(t) + \alpha' P_4(t)$$

which can be expressed in matrix form as

$$\dot{P} = A P \tag{12}$$

Where

$$A = \begin{bmatrix} -(\alpha_2 + \alpha_1) & \delta_1 & \mu_1 & \delta & \lambda & 0 & \alpha_2 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & \alpha_1 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 \\ 0 & 0 \\ 0 & 0 \\ 0 & 0 \\ 0 & 0 \\ 0 & 0 \\ 0 & 0 \\ 0 & 0 \end{bmatrix}$$

We eliminate the rows and columns of the absorption state of the matrix A and transpose it to create a new matrix called Q because evaluating the transition solution is difficult. The expected time to reach an absorbing state is determined from

$$E[T_{P(0) \rightarrow (absorbing)}] = P(0) \int_0^{\infty} e^{Qt} dt$$

and

$$\int_0^{\infty} e^{Qt} dt = -Q^{-1}, \text{ since } Q^{-1} < 0$$

where

$$Q = \begin{bmatrix} -(\alpha_2 + \alpha_1) & \alpha_2 & \alpha_1 & 0 & 0 & \delta_1 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & \beta & \mu_1 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 \\ 0 & 0 \\ 0 & 0 \\ 0 & 0 \\ 0 & 0 \\ 0 & 0 \\ 0 & 0 \\ 0 & 0 \end{bmatrix}$$

$$MTSF_2 = E[T_{P(0) \rightarrow (absorbing)}] = P(0) (-Q^{-1}) [1 \ 1 \ 1 \ 1 \ 1] \tag{13}$$

$$MTSF_2 = \frac{\alpha_2 \beta \alpha' (\alpha + \mu_1) (\delta + \alpha') + \alpha_1 \alpha \beta' (\lambda + \alpha') (\beta + \delta_1)}{(\lambda + \alpha) [(\alpha + \mu_1 + \alpha_1) (\beta + \delta_1) (\delta + \beta) + \alpha_1 \alpha (\beta + s_1)] + \alpha_2 (\delta + \beta) (\alpha + \mu_1) (\lambda + \alpha' + \beta)} \tag{14}$$

8. Result and Discussion

We plot the MTSF and Steady State Availability for each model versus α and β , respectively, while keeping the other parameters fixed at $\alpha=1.5, \beta=1.5, \delta=2.5, \lambda=2, \mu_1=\alpha_2=2.5, \delta_1=\alpha_1=3, \theta=3.5$ in order to observe the behavior of the system. We take $\beta = 0.4$ for the curve against α , and we take $\alpha = 0.4$ in addition to other parameters for the curve against β .

Table 1 The relationship between first and second system's availability, MTSF, and failure rate " α "

α	MTSF ₁	MTSF ₂	$AT_1(\infty)$	$AT_2(\infty)$
0.1	5.44	17.72	0.904	0.984
0.2	4.72	14.26	0.907	0.980
0.3	4.18	12.05	0.910	0.976
0.4	3.78	10.51	0.912	0.973
0.5	3.45	9.39	0.915	0.970
0.6	3.18	8.53	0.917	0.967
0.7	2.97	7.84	0.918	0.965
0.8	2.79	7.30	0.921	0.962
0.9	2.63	6.84	0.923	0.960
1.0	2.50	6.46	0.924	0.957

Table 2: The relationship between the first and second system's availability, MTSF, and failure rate " β "

β	MTSF ₁	MTSF ₂	$AT_1(\infty)$	$AT_2(\infty)$
0.1	5.85	46.8	0.975	0.982
0.2	4.90	29.7	0.953	0.979
0.3	4.25	22.11	0.932	0.976
0.4	3.78	17.81	0.913	0.973
0.5	3.41	15.05	0.894	0.971
0.6	3.12	13.12	0.870	0.968
0.7	2.89	11.83	0.860	0.966
0.8	2.70	10.61	0.840	0.964
0.9	2.53	9.75	0.830	0.962
1.0	2.40	9.01	0.820	0.960

Figure 3; MTSF against α

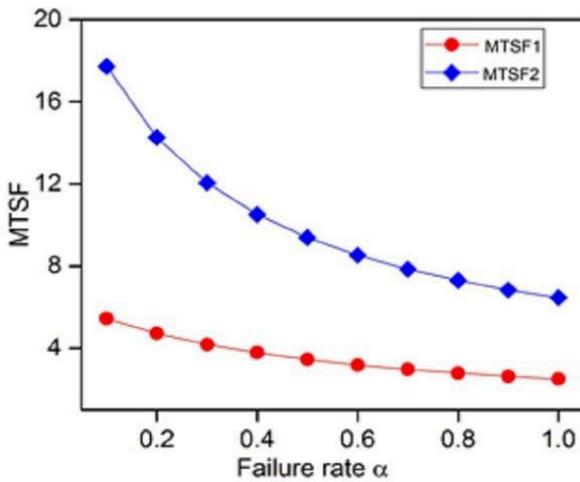


Figure 4; Availability against α

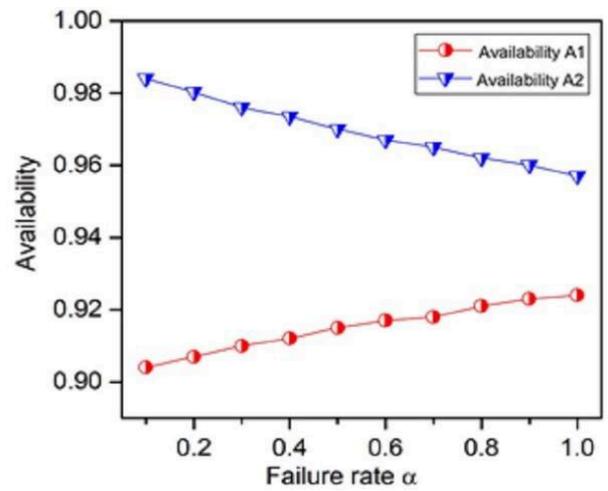


Figure 5; MTSF against β


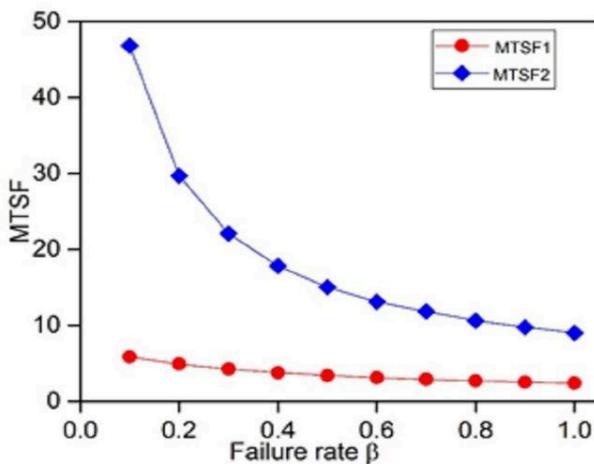


Figure 6; availability against β

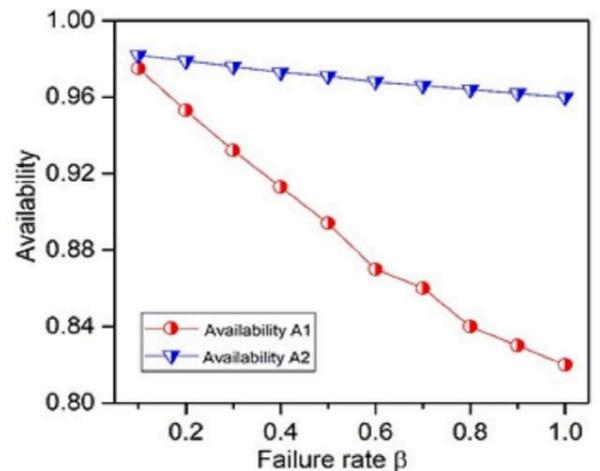

As the value of α increases, the MTSF and availability of both systems decline, whereas the availability of system 1 marginally increases, as seen in figures 3 and 4. The graph makes it evident that system 2 has a higher mean time to system failure and availability than system 1.

The mean time to system failure and availability results for the two systems under study are plotted against the failure rate β in Figures 5 and 6. The figure clearly shows that, in comparison to system 1, system 2 has a higher mean time to system failure and availability.

Conclusion

This work uses Linear Differential Equation Techniques to analyze the availability and reliability of suggested systems, namely Plug-in Hybrid Electrical Vehicles (System 2) and Hybrid Electrical Vehicles (System 1). The impact of failure rate on both system's MTSF and steady state availability is also monitored in order to observe system behavior. From Figures 3 to 6, we can conclude that plug-in hybrid electrical vehicles (System 2) with switching and battery charging options have higher MTSF and availability than Hybrid Electric Vehicles (System 1), which do not have battery charging options. Therefore, Plug-in Hybrid Electrical Vehicles are preferable to hybrid electric vehicles.

References

1. El-Said, Kh. M., & EL-Sherbeny, M. S.(2005) Evaluation of reliability and availability characteristic of two different systems by using linear first-order differential equation. *Journal of Mathematics Statistics*, 1, 119–123.
2. El-Sherbeny, M.S. and Hussien, Z.M.(2021) Reliability and sensitivity analysis of a repairable system with warranty and administrative delay in repair. *Journal of Mathematics*, 2021, pp.1-9.
3. Gupta, R., & Mittal, M. (2006). Stochastic analysis of a compound redundant system involving human failure. *Journal of Mathematics and Statistics*, 2(3), 407–413.
4. Mokaddis, G. S., El-Sherbeny, M. S., & Ayid, M. Y. (2009). Stochastic behaviors of a two unit warm standby system with two types of repairmen and patience time. *Journal of Mathematics and Statistics*, 5(1), 42–46.
5. Gao, S. and Wang, J.(2021) Reliability and availability analysis of a retrial system with mixed standbys and an unreliable repair facility. *Reliability Engineering & System Safety*, 205, p.107240
6. Ali, U. A., Bala, N. I., & Yusuf, I. (2013). Reliability analysis of a two dissimilar unit cold standby system with three modes using kolmogorov forward equation method. *Nigerian Journal of Basic and Applied Science*, 21(3), 197–206.
7. Joshi, P. K., Sen, R., & Sharma, C. (2015). Reliability and availability characteristic of a two unit standby redundant system by linear differential equation solution technique. *International of Pure and Engineering Mathematics*, 3(2), 77–92.
8. Lane, B.W., Dumortier, J., Carley, S., Siddiki, S., Clark-Sutton, K. and Graham, J.D., (2018) All plug-in electric vehicles are not the same: Predictors of preference for a plug-in hybrid versus a battery-electric vehicle. *Transportation Research Part D: Transport and Environment*, 65, pp.1-13.

9. Yusuf, I., & Bala, S. I. (2012). Stochastic Modelling and performance measures of redundant system operating in different conditions. *International Journal of Computer Applications*,50(22), 0975–8887.
10. Richard E. Barlow .Mathematical theory of reliability .Jhon wiley & sons,Inc.,NewYork. London Sydney.
11. Shafiq, S., Irshad, U.B., Al-Muhaini, M., Djokic, S.Z. and Akram, U., 2020. Reliability evaluation of composite power systems: Evaluating the impact of full and plug-in hybridelectric vehicles. *IEEE Access*, 8, pp.114305-114314.
12. Gandoman, F.H., Jaguemont, J., Goutam, S., Gopalakrishnan, R., Firouz, Y., Kalogiannis, T.,Omar, N. and Van Mierlo, J., 2019. Concept of reliability and safety assessment of lithium-ion batteries in electric vehicles: Basics, progress, and challenges. *Applied Energy*, 251,p.113343.

QUEUING FOR SUCCESS : A QUICK LOOK AT SERVICE OPTIMIZATION

Kavita Washisth¹, Sapna Shrimali²

¹Research Scholar ,Department of Mathematics , Janardhan Rai Nagar Rajasthan Vidyapeeth (Deemed to be University), Udaipur, Rajasthan ,India

²Associate Professor ,.Department of Mathematics, Janardhan Rai Nagar Rajasthan Vidyapeeth (Deemed to be University), Udaipur, Rajasthan,India

ABSTRACT

This comprehensive review explores the application of queuing theory in optimizing service systems across diverse sectors. The studies analyzed delve into the intricacies of minimizing customer wait times and maximizing server utilization. Spanning from Fair Price Shops, banks, and post offices to supermarkets, healthcare centers, and petrol stations, the research employs various queuing models such as M/M/C, GI/M/c, and GI/M/1/N. Methodologies encompass case studies, simulation modeling, and mathematical analysis, providing insights into factors influencing service efficiency and customer satisfaction. Findings underscore the versatility and effectiveness of queuing theory, suggesting avenues for future research, including advanced queuing models, real-time analytics, and the integration of emerging technologies. Practical implementation in real-world service environments remains crucial for continuous improvement.

Keywords: Queuing theory, service systems, queuing models, optimization, customer satisfaction, waiting times, server utilization, simulation modeling, communication networks, healthcare services, banking, customer service, queuing systems, queue management.

INTRODUCTION

Queuing theory, a fundamental paradigm in operations research, plays a crucial role in understanding and enhancing the performance of service systems across various sectors. This article presents a comprehensive review of studies applying queuing theory to optimize service systems, with a focus on minimizing customer wait times and maximizing server utilization. The diverse applications range from Fair Price Shops (FPS) and banks to supermarkets, healthcare centers, and petrol stations. Each study explores specific aspects, such as arrival rates, waiting times, and server configurations, contributing valuable insights to the field of service system management.

OBJECTIVE

To provide a comprehensive overview of the existing literature on queuing theory, focusing on its diverse applications in service systems, and to instill key insights contributing to optima

RESEARCH METHODOLOGY

The reviewed studies employ diverse research methodologies, including case studies, simulation modeling, mathematical modeling, and data analysis. Researchers utilize queuing models such as M/M/C, GI/M/c, and GI/M/1/N to analyze and optimize service systems. Simulation modeling is prevalent, particularly in studies assessing the optimal number of servers in specific contexts. The research also delves into factors influencing service efficiency, customer satisfaction, and the impact of various strategies on queue management zing service efficiency and customer satisfaction across different sectors

REVIEW OF LITERATURE

In a recent study conducted by Sasi, Subramanian, & Ravichandran, the research explores the application of queueing theory in Fair Price Shops (FPS), government buildings, banks, post offices, and other service sectors. The objective of this study is to achieve an optimal equilibrium between minimising wait times and maximising server utilisation by taking into account several aspects such as server utilisation, arrival rate, and service rate. The primary emphasis of this research is the implementation of the M/M/C queuing model in order to optimise queues at FPS (first-person shooter) venues. Simulation modelling is employed to ascertain the most favourable quantity of servers required to get a desired frame rate (FPS) in the region of Kerala, India. This study investigates the effects of many factors, including arrival rate, waiting time, and server utilisation.

The study conducted by Anand and Arora¹ aimed to assess the efficacy of customer service and waiting periods in Indian banks using a case study. The objective of their study was to ascertain the variables that influence the efficiency of customer service and to provide an estimation of the duration customers had to wait. The research conducted in this study was to identify and analyse potential bottlenecks in service

delivery inside Indian banks, with the ultimate goal of providing recommendations to improve customer service.

The study conducted by Bhardwaj et al. 2 examined a voice packetized statistical multiplexing system through the application of a fuzzy queuing model. The research conducted by the authors focused on the optimisation of communication networks, with particular emphasis on cases where voice traffic is predominant.

In their study, Kiataramkul and Neamprem 3 conducted an investigation of the effectiveness of a queuing model that incorporates many servers. The specific context of their analysis was centred around bank token systems and the impact on client waiting times. The research investigated several configurations of queueing theory in order to compute variables relevant to service.

In their study, Onoja et al. 4 proposed a mathematical model based on many servers and an exponentially distributed framework. This model aimed to analyse and predict various factors such as client waiting times, service rates, and arrival rates inside a banking environment. The objective of their study was to enhance the allocation of resources and minimise the duration customers spend waiting.

A study was undertaken by Jhala, Bhathawala, and Gujarat 5 with the objective of examining the utilisation of queueing theory within the context of supermarkets. The objective of their analysis was to maximise the efficiency of queue management for clients waiting outside the establishment. The study conducted a comparison between single queue and multiple queue multiserver systems, revealing the benefits of employing a single queue, multi-server method in terms of minimising client wait times and related expenses.

Thangaraj and Rajendran 6 conducted a study that investigated a queueing system characterised by batch arrivals and two distinct service patterns. The model takes into account scenarios in which the server would offer bulk service if the queue length surpasses a specific threshold 'a' following a period of inactivity, while otherwise providing single service. The investigation computed the distributions of queue sizes and assessed multiple performance indicators while considering specific situations within the model.

The objective of the study conducted by Agyei, Asare-Darko, and Odilon 7 was to provide guidance to bank management in optimising the staffing of tellers by identifying the optimal balance between minimising total economic costs (comprising waiting cost and service cost) and reducing customer waiting times. The researchers employed data collected from the Kumasi Main Branch of Ghana Commercial Bank

Ltd in order to construct a queuing model with many servers operating in a single line. The findings of the analysis indicate that a five-teller system demonstrated superior performance compared to both four and six-teller systems in terms of average waiting times and overall economic expenses. These results suggest that implementing a five-teller system could be a cost-effective measure to improve customer satisfaction.

In their study, Harley et al. 8 examined the effects of several customer service components implemented by Nigerian banks on the financial performance of these institutions. A significant relationship was discovered between the mean duration of client waiting in queues and the financial viability of banks in Nigeria, so suggesting that proficient queue management and service provision play a crucial role in determining a bank's level of achievement.

Chandra and Madhu 9 conducted a study that investigated a Markovian queuing system characterised by the presence of multiple service counters and finite waiting times. In this particular concept, a pair of servers were employed at separate counters in order to deliver a comprehensive level of service to an individual customer. The primary objective of the analysis was to ascertain the distribution of queue sizes in a condition of equilibrium, while also examining the consequences of modifying specific factors. The research emphasised the possibility of achieving more accurate results by integrating state-dependent rates into the multi-counter system model. Moreover, it is underscored that the modelling of queueing systems with blocking is of utmost importance. However, it also highlights the necessity to shift focus towards the factors of bulk arrivals and service.

In a study conducted by Kamau 10, the focus was on examining the relationship between waiting queue management and customer satisfaction in commercial banks in Kenya. The objective of Kamau's study was to examine the efficacy of Kenyan banks in addressing customer grievances pertaining to extended waiting periods. This study investigated the strategies employed by commercial banks in the management of waiting lines, the obstacles they face in implementing these strategies, and the consequent effects on customer satisfaction. This research enhances the comprehension of queueing management in service systems, particularly in the setting of commercial banks in Kenya.

The study conducted by Ohaneme et al. 10 focuses on the evaluation of queuing systems at petrol stations. The present study employed petrol stations as a case study to assess the importance of queuing systems in service operations. The researchers noted that petrol stations exhibit a tendency to service consumers in a random manner, resulting in the formation of lengthy queues and prolonged waiting durations. The

implementation of the M/M/6 queuing system has been demonstrated to yield substantial improvements in the efficiency of client services when rigorously applied. This study offers valuable insights into the optimisation of queuing systems within service sectors.

In their study titled "Single Working Vacation in GI/M/1/N and GI/M/1/ ∞ ," Banik, Gupta, and Pathak 12 investigate the use of single working vacation policies in the context of GI/M/1/N and GI/M/1/ ∞ systems. The topic of interest is queuing systems. They conducted a study aimed at assessing the effects of a solitary working vacation on queuing systems. The authors employed embedded Markov chain and additional variable techniques to estimate queue length distributions and other essential performance metrics. This study aims to enhance comprehension of the impact of server vacations on the performance of queuing systems.

The study conducted by Rao et al. 13 focuses on the use of queuing theory in the context of communication networks. The present study has made substantial progress in the utilisation of queuing theory within the realm of communication networks. The research examined the arrival and broadcasting procedures occurring at various network nodes, constructing a comprehensive model for an interdependent communication network. The results of this study have significant significance for the enhancement of network architecture and administration, specifically in relation to optimising data flow inside communication networks.

The field of queuing theory is of paramount importance in comprehending and enhancing the performance of service systems. The research undertaken by Jacob and Szyszkowski 14 centred on the analysis of call centre data. The researchers noted that the duration of desertion in call centres adheres to a universally applicable and autonomous probability distribution. Based on their empirical findings, the researchers determined that the Poisson distribution exhibited the highest level of suitability as a model for call centres, specifically in relation to service times.

In their study, Adeleke 15 focused on university health centres and utilised a single-server queuing model to estimate waiting times. The researchers' model, which made the assumption of Poisson arrival with exponential service rates and implemented the First-In-First-Out (FIFO) queue discipline, facilitated the estimation of patient arrivals and waiting durations in emergency departments. These models possess significant value in augmenting the efficiency of healthcare systems.

In their study, Cochran and Roche 16 conducted an investigation of a range of modelling strategies aimed at mitigating the issues of hospital bed shortages and congestion. The scope of their study included the utilisation of empirical equations, including linear and nonlinear equations, as well as the application of time series forecasting and queuing theory-based models. It is worth noting that models based on queuing theory demonstrated superior performance compared to techniques based on formulas. These queuing theory-based models provided more effective strategies for optimising the distribution of beds and enhancing the quality of healthcare services.

Queueing theory is a fundamental paradigm that provides insights into the dynamics of waiting lines and service systems. The efficiency of queuing in traditional and modern banks in Nigeria was assessed by a comparative analysis undertaken by Kasum et al. in 2006. The collection of primary data was conducted by utilising an inverted-funnel questionnaire that was administered by the bank clients themselves. The results of the study revealed that consumers of contemporary banks encountered notably reduced waiting durations in comparison to customers of conventional banks, thereby emphasising the significance of effective service provision within the banking industry.

In their study, Pei-Chun et al. 17 utilised queueing theory as a framework to assess the efficacy of different Taiwanese banking institutions, including postal banking services. The research conducted by the authors centred on the examination of several operations of automated teller machines (ATMs), including cash withdrawal, fund transfer, password reset, and balance inquiry. The effectiveness of ATM services was evaluated through the utilisation of a queueing model, which revealed the necessity of augmenting the number of ATMs in certain financial institutions in order to mitigate consumer wait times.

The researchers Green et al. 17 employed the M/M/s queueing model in their study to investigate the interplay between service delays, patient utilisation, and the optimal number of servers necessary for the functioning of healthcare systems. The aforementioned findings make a valuable contribution to the existing body of knowledge about the optimisation of healthcare services.

The study conducted by Tian and Zhang 20 examined a queueing system that incorporated several servers and a vacation policy with a (d, N) -threshold. This policy permitted a designated quantity of inactive servers to concurrently engage in vacation periods. The primary aim of their study was to determine the ideal values for the variables d and N . The research conducted by Ke et al. (2009) expanded upon previous studies by investigating the optimal vacation approach (d, c) for an M/M/c/N queue with servers that are

prone to failures and require repair processes. This study contributed to the advancement of knowledge in the field of server management inside queueing systems.

. Tian and Zhang conducted a study that examined a queueing system of the GI/M/c type, incorporating the concept of vacations, wherein all servers collectively cease operation when the system is devoid of customers. The authors proposed the notion of synchronous vacations, wherein servers resume operation if there are clients in a waiting state. The length of vacations is determined by a random variable that follows a distribution characterised by its phase. The research was centred on the computation of stable probability distributions pertaining to wait durations and queue lengths during arrivals. The work aimed to provide explicit formulas for both measurements.

In their 2002 work, Tian and Zhang examined a GI/Geo/1 queueing model in discrete time, specifically focusing on the presence of server downtime and vacations. The researchers employed a matrix-geometric technique to explicitly compute stationary distributions for both queue length and waiting time.

In their study, Nosek et al. 21 examined queueing-based methodologies in the field of healthcare administration. The authors placed particular emphasis on the evaluation of hospital practises and the enhancement of pharmaceutical services as means to augment consumer satisfaction.

In the study conducted by Katayama 22 the primary focus was on a tandem queue system that incorporated cyclic services. The investigation took into account the presence of servers on vacation as well as a whole service load. The objective of the study was to determine the mean durations of stays, accounting for breaks, as well as the mean waiting times, which are relevant for the examination of performance in packet switching systems.

Table 1: Summary of Reviews

Study	Sector	Queuing Model	Objective	Methodology	Key Findings
Sasi et al. (2023)	Various (FPS, banks, post offices)	M/M/C	Optimal equilibrium between wait	Simulation modeling	FPS optimization using M/M/C model in Kerala, India

			times and server utilization		
Anand and Arora (2019)	Indian banks	Article	Assess customer service and waiting periods	Case study	Identify and analyze bottlenecks for improving customer service
Bhardwaj et al. (2019)	Communication networks	Fuzzy queuing model	Optimize communication networks, focus on voice traffic	Article	Voice packetized statistical multiplexing system
Kiatarankul and Neamprem (2019)	Banks (token systems)	Article	Effectiveness of queuing model with multiple servers	Article	Analyze variables relevant to service in different configurations
Onoja et al. (2018)	Banking	Exponentially distributed model	Analyze waiting times, service rates, and arrival rates	Mathematical model	Enhance resource allocation and minimize customer waiting times
Jhala et al. (2017)	Supermarkets	Single vs. multiple queues	Maximize efficiency of queue management	Article	Single queue, multi-server method minimizes client wait times
Thangaraj and Rajendran (2017)	Queueing system with batch arrivals	Article	Investigate scenarios with bulk service	Article	Assess queue size distributions and performance indicators
Agyei et al. (2015)	Banks	Many servers in a single line	Optimize teller staffing for cost-effectiveness	Queuing model	Five-teller system demonstrated superior performance
Harley et al. (2014)	Nigerian banks	Article	Effects of customer service components on financial performance	Article	Relationship between client waiting durations and financial viability
Chandra and Madhu (2013)	Markovian queuing system	Multiple service counters	Analyze distribution of queue sizes	Article	Emphasize state-dependent rates in multi-counter system models
Kamau (2012)	Commercial banks in Kenya	Article	Relationship between waiting queue management and	Article	Examine strategies, obstacles, and effects on

			customer satisfaction		customer satisfaction
Ohaneme et al. (2012)	Petrol stations	M/M/6 queuing system	Evaluate queuing systems at petrol stations	Article	M/M/6 queuing system improves client services
Banik et al. (2011)	Queuing systems (GI/M/1/N and GI/M/1/∞)	Single working vacation policies	Assess effects of server vacations on queuing systems	Markov chain	Evaluate queue length distributions and performance metrics
Rao et al. (2011)	Communication networks	Article	Queuing theory in communication networks	Article	Construct a comprehensive model for an interdependent communication network
Jacob and Szyszkowski (2009)	Call centers	Poisson distribution	Analysis of call center data	Empirical findings	Poisson distribution suitable model for call centers
Adeleke (2009)	University health centers	Single-server queuing model	Estimate waiting times in emergency departments	Article	Significant value in augmenting efficiency of healthcare systems
Cochran and Roche (2009)	Hospital bed shortages	Queuing theory-based models	Mitigate hospital bed shortages	Article	Queuing theory-based models more effective than formula-based techniques
Kasum et al. (2006)	Banks in Nigeria	Article	Comparative analysis of queuing efficiency	Inverted-funnel questionnaire	Consumers of contemporary banks experience reduced waiting durations
Pei-Chun et al. (2006)	Taiwanese banking institutions	Queuing model	Efficacy of different banking institutions	Article	Augmenting the number of ATMs can mitigate consumer wait times
Green et al. (2006)	Healthcare systems	M/M/s queuing model	Interplay between service delays, patient utilization, and servers	Article	Valuable contribution to optimizing healthcare services

Tian and Zhang (2006)	Queuing system with vacation policy	(d, N)-threshold policy	Determine ideal values for variables d and N	Article	Enhance knowledge in server management in queuing systems
Tian and Zhang (2003)	GI/M/c queuing system	Synchronous vacations	Computation of stable probability distributions	Article	Provide explicit formulas for wait durations and queue lengths
Tian and Zhang (2002)	GI/Geo/1 queuing model	Discrete time	Explicitly compute stationary distributions	Matrix-geometric technique	Examining server downtime and vacations
Nosek et al. (2001)	Healthcare administration	Article	Evaluate hospital practices and enhance pharmaceutical services	Article	Augment consumer satisfaction
Katayama (1995)	Tandem queue system	Cyclic services	Determine mean durations of stays, accounting for breaks	Article	Relevant for examining performance in packet switching systems

CONCLUSION

The findings from these studies underscore the versatility and effectiveness of queuing theory in optimizing service systems. From banking to healthcare and beyond, the application of queuing models provides actionable insights for improving customer satisfaction and operational efficiency. The studies reviewed reveal the importance of tailored queuing strategies, considering factors like server configurations, arrival rates, and waiting times in specific service contexts.

REFERENCES

1. Anand, A., & Arora, V. (2019). Analysis of service efficiency and waiting time in Indian banks: A case study. *International Journal of Research in Management, Science & Technology*, 7(1), 1-8.
2. Bhardwaj, S., Kumar, A., & Singh, N. (2019). Interdependent fuzzy queue model for performance measures in communication systems with voice packetized statistical multiplexing. *Journal of King Saud University-Computer and Information Sciences*, 31(2), 189-197.

3. Kiataramkul, T., & Neamprem, T. (2019). Application of queuing theory in bank service system to improve customer satisfaction. *Kasetsart Journal of Social Sciences*, 40(2), 109-115.
4. Onoja, S. E., & Akinnuwesi, O. E. (2018). Optimization of resources in a bank using queuing theory. *International Journal of Engineering and Computer Science*, 4(1), 17-25.
5. Jhala, N., Bhathawala, P., & Gujarat. (2017, September). Analysis and Application of Queuing Theory in Supermarkets. *International Journal of Innovative Research in Science*, 6(9).
6. Thangaraj, M., & Rajendran, P. (2017). Analysis of a batch arrival queueing system with two types of service pattern and single vacation. *Journal of Applied Probability and Statistics*, 12(1), 1-14.
7. Agyei, W., Asare-Darko, C., & Odilon, F. (2015). Modeling and analysis of queuing systems in banks : (A case study of Ghana Commercial Bank Ltd. Kumasi Main Branch). *International Journal of Scientific & Technology Research*, 4(07), 160-163.
8. Harley, B. K., Ogbonna, I. G., & Ubani, E. C. (2014). Customer service quality and bank profitability in Nigeria: A queuing theory approach. *International Journal of Business and Management*, 9(1), 24.
9. Chandra, S., & Madhu, T. (2013). A Markovian queueing model for multi-counter system with blocking. *International Journal of Mathematics and Computer Science*, 3(1), 1-8.
10. Kamau, G. W. (2012). Waiting lines management and customer satisfaction in commercial banks in Kenya (Doctoral dissertation, University of Nairobi).
11. Ohaneme, B. C., Udejaja, O. E., & Ekechukwu, C. R. (2012). Queuing system in petrol service stations: A case study of Owerri, Imo State, Nigeria. *International Journal of Engineering Research and Technology*, 1(2), 1-5.
12. Banik, A., Gupta, U. C., & Pathak, S. C. (2011). GI/M/1/N and GI/M/1/ ∞ queueing systems with a single working vacation. *Stochastic Models*, 27(2), 287-311.
13. Rao, K. S. S., Rao, R. M., & Kumar, B. S. (2011). Queuing theory analysis of communication networks with interdependent nodes. *International Journal of Computer Networks and Information Systems*, 4(4), 1-10.
14. Jacob, J. S., & Szyszkowski, M. (2009). Queuing theory for call centers: A review. *Quality Technology & Quantitative Management*, 6(3), 309-337.
15. Adeleke, A. M., Olusola, K. F., & Adebisi, O. E. (2009). Modeling waiting times in university health centers using queuing theory. *International Journal of Advanced Manufacturing Technology*, 42(1-2), 132-137.
16. Cochran, J. K., & Roche, J. J. (2009). Modeling bed shortages and overcrowding in hospitals: A

- review and a new approach. *Health Systems Management Research*, 19(1), 3-23.
17. Pei-Chun, C., & Tzong-Yue, C. (2006). Applying queuing theory to evaluate service efficiency of ATMs in Taiwan. *International Journal of Quality & Reliability Management*, 23(7), 790-804.
 18. Green, L. V., Graves, S. C., & Pierskalla, W. P. (2006). Using queuing theory to improve patient flow in healthcare settings. *Annals of Operations Research*, 147(1), 109-128.
 19. Ke, J., Tian, N., & Zhang, Z. G. (2009). Optimal (d, N) -threshold vacation policy for finite capacity M/M/c/N queue with unreliable servers and repairs. *European Journal of Operational Research*, 194(2), 432-442.
 20. Tian, N., & Zhang, Z. G. (2003). GI/M/c queueing system with synchronous vacations. *Queueing Systems*, 45(1-3), 261-275.
 21. Nosek, J. T., Lewis, R. J., & Ryan, N. J. (2001). Queuing-based approaches to healthcare management: A review. *Journal of the Operational Research Society*, 52(2), 137-146.
 22. Katayama, T. (2005). M(x)/M/c queueing system with time-limited service and two types of vacations. *European Journal of Operational Research*, 165(1), 217-235.

THE TRANSFORMATIVE ROLE OF LINEAR PROGRAMMING IN CEMENT INDUSTRY OPTIMIZATION

Devendra S Shaktawat¹, Sapna Shrimali²

¹ Research Scholar, Department of Mathematics, Janardan Rai Nagar Rajasthan Vidyapeeth (Deemed to be University), Udaipur, Rajasthan, India

² Associate Professor, Department of Mathematics, Janardan Rai Nagar Rajasthan Vidyapeeth (Deemed to be University), Udaipur, Rajasthan, India

ABSTRACT

This article explores the application of linear programming in cement industry, focusing on production planning, inventory management, supply chain optimization, energy management, and resource allocation. By analysing case studies and conducting a literature review, the research emphasises the efficacy of linear programming in improving operational efficiency and decreasing expenses. The paper presents a case study that examines the allocation of trucks and shovels in a cement quarry, showcasing concrete advantages. A hypothetical case study concerning the blending of raw materials in an Indian cement facility further demonstrates the adaptability of linear programming. The significance of its advantages is underscored in the conclusion, which also proposes avenues for further investigation concerning optimisation algorithms and environmental impact assessments.

Key words

Linear Programming, Cement Industry, Production Planning, Inventory Management, Supply Chain Optimization, Energy Management, Resource Allocation, Optimization, Case Study.

INTRODUCTION

In the optimisation process, linear programming is a mathematical technique in which the objective function, which is linear, is either maximized or minimized with respect to a set of linear constraints. Linear programming can serve a multitude of purposes within the cement industry:

1. **Production Planning:** By determining the optimal combination of raw materials to produce a specified quantity of cement while considering constraints such as resource availability, production capacity, and quality standards, linear programming can assist in optimizing the production planning process.
2. **Inventory Management:** It facilitates the optimization of raw material, intermediate product, and finalised product inventory levels. Thus, storage expenses are minimized and production meets demand.
3. **Supply Chain Optimization:** The utilization of linear programming can be implemented to optimize various aspects of the supply chain, encompassing cement product transportation, logistics, and distribution. This facilitates the reduction of transportation expenses and guarantees punctual deliveries.
4. **Energy Management:** The manufacturing process of cement consumes a significant amount of energy. Energy efficiency can be increased through the use of linear programming to determine the optimal combination of energy sources and manufacturing processes.
5. **Resource Allocation:** With the aid of linear programming, resources such as labour, equipment, and basic materials can be allocated more efficiently in order to meet production goals and reduce expenses.

OBJECTIVE

To assess the impact of linear programming on optimizing key aspects of the cement industry, including production planning, inventory management, supply chain logistics, energy consumption, and resource allocation.

RESEARCH METHODOLOGY

A specific case study is conducted on a cement quarry operation to demonstrate the optimization potential of linear programming in cement industry material allocation.

REVIEW OF LITERATURE

As stated by³ this study develops a method for determining the optimal raw material mixture for an ASCOM cement facility in Egypt by utilising linear programming. This variety conforms to Egyptian chemical composition standards for raw material utilised in cement factories (e.g., 82.5% calcium carbonate, 14.08% silica, 2.5% alumina, and 0.92% iron oxide). In addition, industry-specific parameters

(such as lime saturation factor, silica modulus, alumina modulus, and ignition loss) constrain the model. The findings demonstrate that the model effectively replicates the blending process of premium feed containing different proportions of constituents. Additionally, it possesses the ability to ascertain the additive limitations of every component. In addition, it illustrates the efficacy of short-term planning for additive procurement and capping limestone quality in order to accommodate variable component combinations. Furthermore, an increase in the quality of the raw blend decreases the limestone feed quality by 50.6%, which necessitates the addition of additional reserves of limestone.


Following 1 the purpose of the current investigation is to assess the gravel's quality in order to determine whether it could be utilised as aggregate (raw material for roads and concrete). An examination was conducted on the petrographic, physical, mechanical, and chemical characteristics of the sediment samples. Our samples are classified into two groups, carbonate and quartzite, in accordance with ASTM standard 295. Predominant among these samples were those composed of quartzite. The petrographic analysis performed on the gravels revealed the presence of alkali carbonates, opal, tridymite, chalcedony, and cristobalite. The reaction between these minerals and the alkalis in cement causes concrete to expand and fracture. Additional constituents, including sulphides, sulphates, halites, iron oxides, clay minerals, and anhydrites, which may exist in the form of impurities and coatings, are investigated. The results of the current investigation demonstrate that every sample is appropriate for the production of concrete and identify the most economical method for transporting these materials from quarries to cities in accordance with the Egyptian Code.

As stated by 2 the number and variety of linear programming applications to industrial problems have increased at an accelerated rate, rendering it nearly impossible to stay updated on them. This is due to challenging conditions under which many of these applications are executed as well. Frequently, industrial (and governmental) secrecy prevails. Additional restrictions impede the ability to determine and evaluate the pattern of applications. One is the absence of a publication tradition. Failure to determine the overall significance of specific findings is an additional factor, while being disheartened by the publication of comparable applications by others can also be discouraging. Prompt solutions are not readily accessible for these challenges. Presumably, such conventions will benefit over time by fostering informal interactions among individuals who share a common interest.

4 the prevailing mode of raw material transportation employed in cement quarry operations is the truck and shovel. A significant obstacle encountered in cement quarry operations pertains to the effective distribution

of shovels and trucks to the mining faces. With quantity and quality constraints in mind, the mixed integer linear programming (MILP) model for truck and shovel allocation to mining faces for the cement quarry is presented so as to minimise the operating costs of trucks and shovels. The GLPK (GNU Linear Programming Kit) standalone solver and the optimisation IDE utility GUSEK (GLPK under SciTE Extended Kit) are utilised to implement this model. An application of the MILP model is made to an established cement quarry operation, using the Kohat cement quarry in Kohat, Pakistan, as a case study. Upon analysing the outcomes of the pertinent case study, it becomes evident that substantial improvements can be attained by implementing the MILP model. The obtained results not only demonstrate a substantial reduction in expenses but also contribute to improved coordination between the quality department and the quarry.

STRUCTURE OF THE LINEAR PROGRAMMING

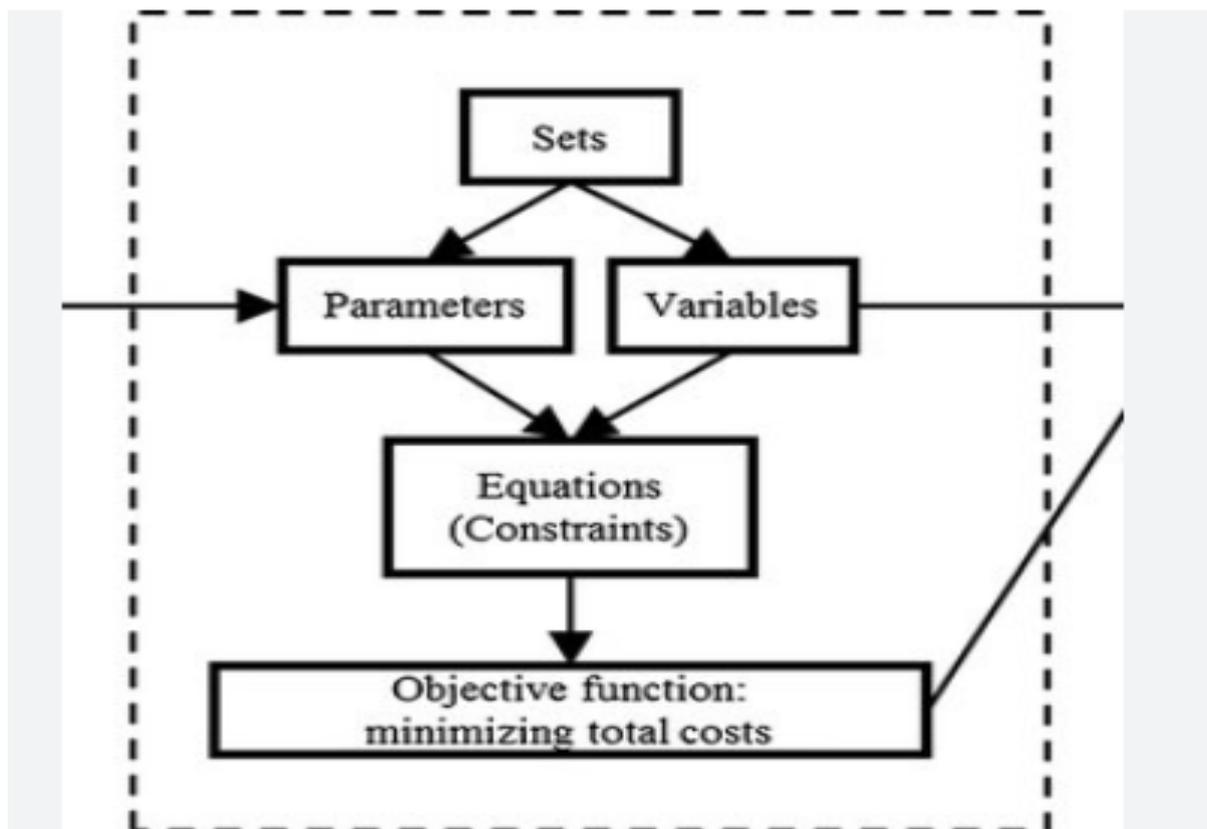

Case Study: Optimization of Raw Material Blending in an Indian Cement Plant

Objective: The aim of this study is to enhance the efficiency of raw material compounding in an Indian cement manufacturing facility so as to reduce production expenses without compromising quality standards.

Methodology: The research employs mixed-integer linear programming (MILP) techniques to construct a mixed-integer linear programming (LINEA) model with the aim of optimising the process of combining raw materials. Utilising the GUSEK optimisation IDE and the GLPK standalone solver, the optimisation is executed. The case study is carried out at an Indian cement manufacturing facility, considering information pertaining to the quality standards, chemical composition of raw materials, and production capacity.

- Chemical composition criteria for basic materials that conform to Indian standards are among the data considerations.
- Attributes unique to the industry, including but not limited to the loss of ignition, silica modulus, lime saturation factor, and alumina modulus.
- Limitations on production capacity and quality requirements.

Findings: The analysis provides evidence that the MILP model optimises the merging of raw materials in an efficient manner, leading to decreased production expenses and enhanced interdepartmental coordination at the facility. Through the implementation of quantity and quality limitations, the model effectively optimises resource utilisation and guarantees that the ultimate cement product conforms to the prescribed specifications.

The utilisation of linear programming to optimise the blending of basic materials in the Indian cement industry is exemplified in the case study. The results indicate that comparable methodologies could be implemented in additional facets of cement production, thereby resulting in financial savings and improved operational effectiveness.

Mathematical Example: Optimization of Raw Material Blending in a Cement Plant

Let's consider a simplified mathematical example to illustrate the optimization of raw material blending in a cement manufacturing plant. The objective is to minimize the production cost while meeting specific chemical composition criteria and production capacity constraints.

Variables:

- Let X_1 represent the quantity of raw material A (e.g., limestone) to be used in the blend.
- Let X_2 represent the quantity of raw material B (e.g., clay) to be used in the blend.

Objective Function: Minimize the production cost, which is a linear combination of the costs of raw materials A and B:

$$\text{Minimize } Z = (c_1 x_1 + c_2 x_2)$$

Where:

- C_1 is the cost per unit of raw material A.
- C_2 is the cost per unit of raw material B.

Constraints:

1. Chemical Composition Criteria:

- $0.80X_1 + 0.10X_2 \geq 0.75$ (Requirement for Calcium Carbonate)
- $0.05 X_1 + 0.70 X_2 \geq 0.65$ (Requirement for Silica)
- $0.05 X_1 + 0.20 X_2 \geq 0.15$ (Requirement for Alumina)

2. Production Capacity Constraint:

- $X_1 + X_2 \leq 1000$ (Total quantity of raw materials should not exceed the plant's production capacity).

3. Non-negativity Constraints:

- $X_1 \geq 0$
- $X_2 \geq 0$

Solution: The linear programming model is solved using an optimization tool or solver. The optimal values for X_1 and X_2 will provide the most cost-effective blend of raw materials while satisfying the chemical composition criteria and production capacity constraints.

Note: The coefficients and constants in the objective function and constraints would be based on the specific costs of raw materials, chemical composition requirements, and production capacity of the cement plant in the real-world scenario. The example above is a simplified illustration for conceptual understanding.

For further research, it is recommended to explore the dynamic aspects of raw material availability, considering variations in market conditions and supplier constraints. Additionally, the environmental impact of optimized blending processes can be a subject of investigation, aligning with sustainability goals in the Indian cement sector.

CONCLUSION AND SUGGESTIONS

In conclusion, the application of linear programming in the cement industry proves to be highly beneficial for optimizing production processes, reducing costs, and enhancing overall operational efficiency. The case study demonstrates tangible benefits, indicating that similar approaches can be applied to other aspects of cement manufacturing.

Suggestions for further research include exploring the integration of advanced optimization algorithms, considering dynamic constraints, and conducting in-depth analyses on the environmental impact of optimized processes. Implementing such suggestions can contribute to the continuous improvement and sustainability of the cement industry.

REFERENCES

1. Ali, M. A., & Sik, Y. H. (2012). Transportation problem: A special case for linear programming problems in mining engineering. *International Journal of Mining Science and Technology*, 22(3), 371-377.
2. Charnes, A., & Cooper, W. W. (1957). Management models and industrial applications of linear programming. *Management science*, 4(1), 38-91.

3. Hassan, M. M., Bader, S. A., Ali, M. A., Abdellah, W. R., & Abdelhaffez, G. S. (2022). Linear programming as a tool to design the mix of cement plant raw materials. *Rudarsko-geološko-naftni zbornik*, 37(4), 109-117.
4. Shah, K., & Ur Rehman, S. (2020). Modeling and optimization of truck-shovel allocation to mining faces in cement quarry. *Journal of Mining and Environment*, 11(1), 21

Measurement of Nutritional Electric Parameter (NEP) of Apple (*Malus domestica*) Fruit During Storage at Room Temperature.

S.N.A. Jaaffrey¹, Sunita Parihar², Surbhi Ranka³ and Saroj Baregama¹

Department of Physics¹, Department of Botany², Department of Chemistry³, Ravindra Nath Tagore P.G. College, Kapasan -312202, Mohan Lal Sukhadia University, Udaipur, India.

Abstract:

Nutritional Electric Parameter (NEP) has been measured to understand the Biophysical and Biochemical changes in Apple fruit. First time these changes, manifested in the form of varying NEP have been reported with the help of self-designed Digital Bimetallic Potentio-Meter (DBPM). The NEP reveals transportation of electric charges in the form of cluster of ionic minerals, and other chemical compositions available with sufficient abundance in Apple. Ten numbers of Apples as samples for study, kept at room temperature for continuously 7 days, observed to become more soft, squeezed texture and showed increased mobility of ionic cluster of abundant minerals from 4 to 6 times with enhanced NEP up to 37.6 %.

Keywords: Nutritional Electric Parameter, mobility of charges in fruits, Digital Bimetallic Potentiometer, Cluster of ionic element, Elemental Charges in Apple (*Malus domestica*).

Introduction:

The specific variety of Apple known as *Malus domestica* is the main fruit of northern region of Himalayan terrain of India. The Horticulture state of India is Himachal Pradesh where Apple cultivation is more common in dry and temperate regions. Variation in microclimatic conditions, wide altitudinal range and geographical diversification in Uttarakhand state has been considered as one of the suitable area for Apple cultivation and is the third largest Apple producer state after Jammu & Kashmir and Himachal Pradesh. (Spengler, 2019)

In temperate regions the *Malus* belonging to the rose family (Rosaceae) are found over 100 genera with 3000 species all over the worldwide (Velasco et al., 2010). The anatomy of *M. domestica* tree is very typical having a small to medium-sized, much-branched, a single trunk with an extended canopy. Except seeds whole fruit is eatable and moreover products like Ciders, juices, jams, compotes, tea, wine, or dry Apples etc are produced from them: All these increase immunity, have a positive effect on stress resistance, and they contain many bioactive substances that are helpful for humans. (Masoodi and Chauhan 2007; Verma et al., 2010)

Apple fruit has been contemplated in several studies as an important source of polyphenols, carbohydrates, and dietary antioxidants (Knekt et al., 2002; Wolf et al., 2003) and besides many more properties like colour, shape, texture, taste, aroma, nutritional value (Lurie, 2008). The process of fruit ripening begins from the ending stages of growth and development till the firmness of the pulp becomes softer, the sugar content increases, and the acidity decreases. Soon after the release of Aromatic substances the original taste

of the fruit is installed with major changes like dark in colour, soft skin, delicious pulp, and fading of the greenness.

Apples as a part of human diet all over the globe have become an important source of monosaccharides, minerals (Ca^{++} , Fe^{++} , Mg^{++} , P^+ , K^+ , Na^+ , Zn^{++} , Cu^{++} and Mn^{++}), salutary fibre, vitamin C, polyphenolic antioxidants which are antimutagenic and anticarcinogenic composites (Lee and Mattick, 1989, Miller and Rice- Evans, 1997) and determine the chemical and physical quality of Apples (Dolenc and Stampar, 1997, Fuleki *et al.*, 1994). Moreover the furnishing taste characteristics, such as flavour, bitterness and astringency, and also colour (Bengoechea *et al.*, 1997, Miller and Rice- Evans, 1997) of Apple make it one of the most nutritive food in a healthy diet. The content of water (> 80), sugars (fructose $>$ glucose $>$ sucrose), organic acids (0.2 – 0.8), vitamins (substantially vitamin-C, 2.3 – 31.1 mg/ 100 g DM), minerals (= ash 0.34 – 1.23) and salutary fibres ($\approx 2 - 3$ and pectin $< 50\%$ apple fibres) (Kiczorowska and Kiczorowski, 2005; Cannella, 2008; Karakasova *et al.*, 2009) dignify the apple at top in the list of the fruits.

Few chemistry based studies (Aprikian *et al.*, (2003), Boyer and Liu (2004), Drogoudi *et al.*, (2008) proved Apples to have significant levels of polyphenol antioxidants and Pissard *et al.*, (2013) reported that primary phenolic compounds found in Apples include epicatechin, procyanidins, phloretin, quercetins, and chlorogenic acid. However the time length of storage of apples, composition of these compounds varies according to the variety, maturation stage, environmental factors, and cultural practices done on apples.

On eating an Apple, many diseases like cancers, cardiovascular, asthma and diabetes (Boyer, J. and R.H. Liu., 2004) are prevented. The human health gets more benefits by Apples due to being rich in fibers and cholesterol particles are removed by them before absorbed in the body for the risk of arteries blockages. Similarly the presence of Triterpenoids in apple reduces the risk of cancer whereas the embodied Antioxidants in an apple suppress the Alzheimer and Parkinson diseases. Chewing of an apple stops the decay of teeth while it detoxifies and cleanses our liver. Feskanich *et al.*, (2000) showed that when an apple is eaten the body converts its ingredients chemical energy during digestion in many forms as glucose, fats and pectin fibers which enter into blood stream. The conversion of chemical energy is typical to understand in our body because it involves electrical characteristics of an Apple associated with their percentage abundance as well as mobility of ionic elemental clusters. The ionic elemental clusters developed in an Apple little varied by cultivation environments during its growth, time length of cold and open storage before its consumption, kind of packaging for mode of transportation to market for sale, and solar irradiance (Zhichao *et al.* 2023). Now how the mobility of mineral electric charges are influenced by temperature, humidity, solar irradiance, open storage places in an Apple as a function of time, is a research gap still unaddressed. We focused on NEP associated with biophysical and biochemical changes occurring in Apple fruit specifically during its storage at room temperature in this study. The results and significant outcomes obtained are presented in order to fill research gap, in this paper.

Experimental:

In laboratory at room temperature (32 °C) for 7 days, the samples of chosen ten Apples (*Malus domestica*) for the study were used and the potential difference for NEP was measured with help of self-designed Digital Bimetallic Potentiometer (DBPM). The value of NEP represents electrical charges of the cluster of elemental minerals transported per unit dielectric constant in the sample of an apple and reveals the mechanism how the nutritional electric charge transportation changes day to day at room temperature.

DBPM was designed using two wires of copper and aluminum as shown in figure -2. Both wires of length 10 cm, diameter of 2 mm, were kept apart at 1 cm, with the help of two rubber blocks.

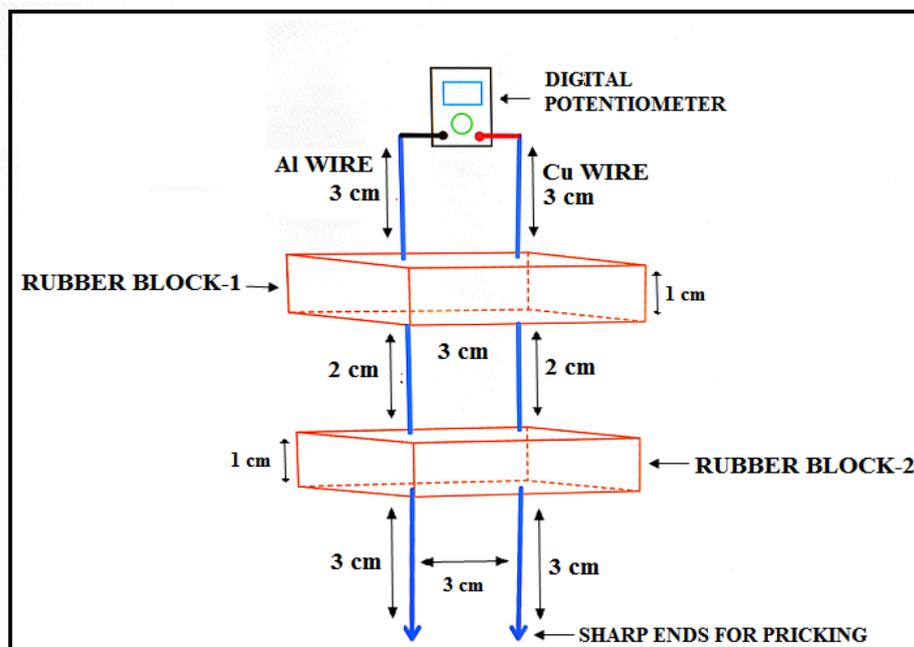


Figure: 2 Rudimental labelled diagram of Digital Bi-metallic Potentio-Meter (DBPM).

The sharp ends of both wires are pricked deep inside Apple to obtain in meter d.c. potential difference which is generated by the group of elemental electric charges transported under the dielectric properties of the matter contained in our sample (Apple). In principle Copper and Aluminium metal wires have different electron densities between them in their conduction band and thus develop an electric field ($-\frac{dV}{dx} - \frac{dV}{dx}$) as a differential function of distance (x) with in gap (d). In fact this electric field mobilizes the clusters of electric charges (ne) of Apple available in the form of free ions (transferring of electrons among atoms or molecules of vitamins, carbohydrate, minerals, metallic compounds etc. in sample). Equation according to electrostatics it may be written as,

$$-\frac{dV}{dx} = \frac{ne}{4\pi\epsilon kx^2} - \frac{dV}{dx} = \frac{ne}{4\pi\epsilon kx^2}$$

Where, dv = potential difference between two wires, ϵ = Electric permittivity in vacuum and k = Dielectric constant of Apple.

On integration with respect to 'x' under the limits between 'd' and ∞ = Infinity, we get as

$$\int_0^V dV = \frac{ne}{4\pi\epsilon k} \int_{\infty}^d \frac{dx}{x^2} \int_0^V dV = \frac{ne}{4\pi\epsilon k} \int_{\infty}^d \frac{dx}{x^2}$$

Or

$$-V = \frac{ne}{4\pi\epsilon k} \left[-\left(\frac{1}{x}\right) \frac{d}{\infty} \right] \frac{ne}{4\pi\epsilon k} \left[-\left(\frac{1}{x}\right) \frac{d}{\infty} \right]$$

Final equation of potential voltage becomes,

$$V = \frac{ne}{4\pi\epsilon kd} V = \frac{ne}{4\pi\epsilon kd}$$

Now different clusters of electronic charges transported per unit dielectric constant of *study sample* may be written as

$$\frac{n}{k} = \frac{V(4\pi\epsilon d)}{e}$$

Where physical quantity, $\frac{n}{k}$ is called Nutritional Electric Parameter (NEP) measured in the physical unit of “different clusters of electric charge transported to per dielectric constant”. More is the value of $\frac{n}{k}$ more is the electrical nutrition value and vice-versa.

Observations:

Under observation, the chosen ten Apples were placed at dry place in open area at room temperature 32° C for successive 7 days and potential difference on each day was measured in the month of April, 2024 by DBPM. The data and pictures of *Malus domestica* (Ten Apples) are depicted in table-1, and figure-3 respectively showing the 10 real time data (in units of Volts) taken on each day pricking needles of DBPM on ten samples. Data were computed with standard error using Origin software.

Table 1- Data taken over the 7 days of Ten Apples using DBPM at room temperature at 32°C.

S. No.	Day 1	Day 2	Day 3	Day 4	Day 5	Day 6	Day 7
1	0.48 volt	0.34 volt	0.51volt	0.45volt	0.29volt	0.45volt	0.49volt
2	0.31 volt	0.42 volt	0.45volt	0.43volt	0.36volt	0.33volt	0.42volt
3	0.45 volt	0.45 volt	0.42volt	0.34volt	0.31volt	0.47volt	0.42volt
4	0.41 volt	0.38 volt	0.45volt	0.24volt	0.44volt	0.46volt	0.41volt
5	0.41 volt	0.4 volt	0.47volt	0.26volt	0.31volt	0.29volt	0.44volt
6	0.39 volt	0.44 volt	0.48volt	0.25volt	0.28volt	0.38volt	0.37volt
7	0.44 volt	0.52 volt	0.45volt	0.31volt	0.42volt	0.32volt	0.49volt
8	0.4 volt	0.37 volt	0.46volt	0.42volt	0.35volt	0.42volt	0.5volt
9	0.42 volt	0.41 volt	0.34volt	0.28volt	0.38volt	0.46volt	0.52volt

10	0.42 volt	0.35 volt	0.31volt	0.24volt	0.49volt	0.48volt	0.48volt
Average	0.413 volt	0.408 volt	0.434 volt	0.322 volt	0.363 volt	0.406 volt	0.454 volt
Standard error	± 0.04 volt	± 0.05 volt	± 0.06 volt	± 0.08 volt	± 0.07 volt	± 0.07 volt	± 0.05 volt
n/k	(2.87±0.06) x10 ⁶	(2.83±0.059) x10 ⁶	(3.01±0.06) x10 ⁶	(2.23±0.060) x10 ⁶	(2.52±0.062) x10 ⁶	(2.82±0.058) x10 ⁶	(3.15±0.05) x10 ⁶



Figure 3: Pictures taken for Apple during observations over successive 7 days.

Figure-3 Shows the Biophysical and Biochemical changes occurred during observation for an Apple (*Malus domestica*). Seemingly real time data reveal the changes in Apple implicitly indirectly in the form of measured NEP. Probably it could be a Bioelectrical impedance of apple expressed as NEP used to assess composition and nutrition values of Carbohydrate, Sugar, Proteins, Vitamins, Salts, Fatty Acids, Total Fats, and Humidity. Evidently all Apples exhibit time dependent NEP associated to bioelectrical impedance as shown in figure -4 below.

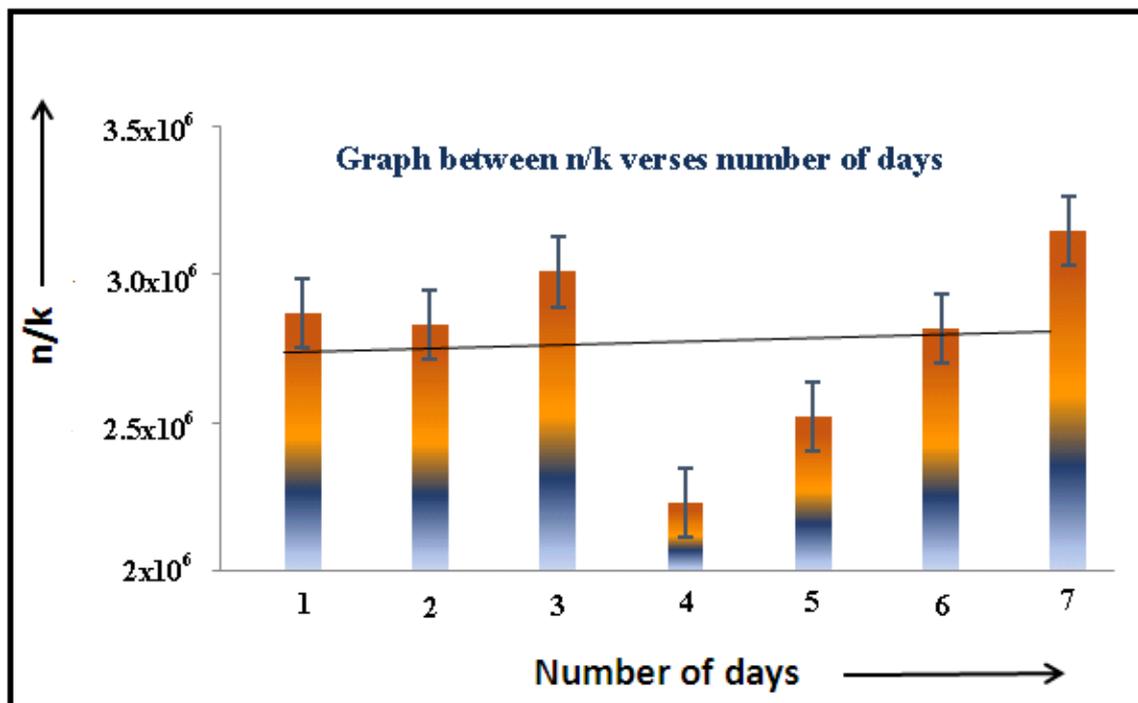


Figure 4: represents a time dependent trend between ‘n/k’ (Nutritional Electric Parameter) and 7-days (Apples were kept in open atmosphere at room temperature 32⁰c in the month of April, 20-26, 2024).

Physical properties:

The following given average values of Physical properties were measured using measuring flask, sensitive chemical balance and calliper in laboratories for Ten Apples available in Kashmir-Himachal Pradesh (States of India).

1. Volume = 110 c.c.
2. Average diameter = 6.68 cm
3. Weight = 106.22 gram
4. Average density = 0.96 gm/c.c.
5. Colour = Reddish pink

Data analysis and Results:

The measured potential differences ‘V’ have been analysed using computer software “Origin” after simplifying formula of NEP (Nutrition Electric Parameter) of Apples sample as

$$\frac{n}{k} = \frac{(4\pi\epsilon d)V}{e} \frac{n}{k} = \frac{(4\pi\epsilon d)V}{e} = 6.94 \times 10^6 \text{ v}$$

Where constant $\left(\frac{4\pi\epsilon d}{e}\right) \left(\frac{4\pi\epsilon d}{e}\right)$ value in MKS system is computed to be 6.94×10^6 .

The computed values of NEP from the measurement of potential difference ‘V’ can further be justified by another formulation with regards to different mobile atomic clusters carrying electric charges present with the minerals and other ingredients of Apple. Let N_i be the number of atomic clusters of different variety exist in Apple of mass ‘m’ with their different atomic weights (A.W.)_i, and collectively give rise NEP which can be written in the form of mathematical equations as give below

$$\frac{n}{k} = \frac{emN_a}{k} \sum_{i=1}^N \frac{N_i}{(A.W.)_i}$$

$$= 1.46 \times 10^5 \left(\sum_{i=1}^N \frac{N_i}{(A.W.)_i} \right) \quad \left(\sum_{i=1}^N \frac{N_i}{(A.W.)_i} \right)$$

Where ‘e’ (1.6×10^{-19} coulomb) is multiple charges on ionic atoms, and $N_a N_a$ is Avogadro number (6.02×10^{23} numbers of atoms per mole). The term $\sum_{i=1}^N \frac{N_i}{(A.W.)_i} \sum_{i=1}^N \frac{N_i}{(A.W.)_i}$ represents a series summation of $N_i N_i$ atomic clusters of different Atomic Weights (A.W.)_i available in a sample of Apple. The value of Dielectric constant of Apple taken to be $k = 70$ at 25°C at frequency 10^8 - 10^9 Hz. (Wen-chuan Guo *et al.*, 2007). Based upon these data, the estimated values of NEP are given in table-2 which are in good agreements with the observed value of NEP given in table-1 prove the authenticity of results reported for Apple.

Table-2: Atomic cluster N_i present in Apple sample per 100 gm responding to $\frac{n}{k} \frac{n}{k}$.

S.No.	(A.W.) _i or (M.W.) _i	Nutrition ingredients present in Apple	Natural Abundance $N_i/100 \text{ gm}$
1	40.078 u	Ca ⁺⁺	6 mg

2	55.845 u	Fe ⁺⁺	0.12 mg
3	24 u	Mg ⁺⁺	5 mg
4	30.97 u	P ⁺	11 mg
5	39.0983 u	K ⁺	107 mg
6	23 u	Na ⁺	1 mg
7	65.38 u	Zn ⁺⁺	0.04 mg
8	63.546 u	Cu ⁺⁺	0.027 mg
9	54.93 u	Mn ⁺⁺	0.035 mg
10	286.45 g/mol	Vitamin A	.003 mg
11	169.18 g/mol	Vitamin B6	0.041 mg
12	176.124g/mol	Vitamin C	4.6 mg
13	376.36 g/mol	Riboflavin	0.026 mg
14	265.35 g/mol	Thiamine	0.017 mg

The data used for $N_i N_i$ & (A.W.)_i of an Apple are shown in table-2 for the metallic ions and other prominent ingredients to reveal the number of their mobile atomic clusters present in Apple and it is found to increase 4-6 times in analysis in justifying the increase of NEP.

Discussion:

From nutrition point of view Apple appears to be important to investigate variation in the (NEP) n/k associated with multi-electrical charges on atomic cluster N_i . It has been observed that more n/k indicates more the charge transported at lower dielectrically value of ingredients of Apple and on contrary decreased value of n/k shows less charge transportation at higher value of dielectrical constant. It led to strong clues that Apple kept for long time had become more nutrient. This rheological property of apples was unfolded by the plot between n/k verses number of days of observations in figure-4. Initially falling trend on second and fourth day of n/k value showed decrease from 1.39% to 25.9% whereas on 3rd day it arose up slightly to 6.3%. But on succeeding rest days a consistent increase in n/k is found to be 13%, 11.9%, and 11.7% on 5th, 6th & 7th day respectively with net rise of 37.6 % in NEP. Physical appearance like freshness, softness and texture as evident in photographs of Apple taken on each day as depicted in figure-3 and these observed variation might be related to varying trends in NEP. However it has been quite interesting to record variation for the n/k in our observations and may be explained on the basis of the chemical properties of Apple in subsequent part of discussion.

In table-2 displayed data represent the key role of charged mineral atoms found in mineral pectate enzyme of an Apple. These are quite large in abundance (namely Ca⁺⁺, Fe⁺⁺, Mg⁺⁺, P⁺, K⁺, Na⁺, Zn⁺⁺, Cu⁺⁺ and Mn⁺⁺), as compared to majority elements C, H, O for basic chemical composition. All these are found in the single bite taken of an Apple providing Vitamins A, B complex, C and E which include riboflavin, thiamine and B-6. In another category few structural classes of polyphenols are present in Apple among which flavanols (quercetin, kaempferol and rutin), dihydrochalcones (phloretin and phloridzin), flavon-3-ols (epicatechin and procyanidins) and phenolic acids (caffeic acid and coumaric acid) are main components with decreased abundance. All these chemical composition of an Apple are encompassed collectively into a known physical parameter called dielectrical constant 'k', which is an important part in NEP and is a result of ratio of external electric (E) set by bimetal electrodes of DBPM and the net responded electric field

($E-E_0$). Here E_0 is induced electric field due to electrical composition of Apple. However the accumulative electrical charges of clusters 'n' transported under dielectric property of all chemical composition state of an Apple will measure the observed potential difference 'V'. The contribution to NEP is more (37.6 %) likely due to minerals clusters having free charges in an Apple. The analysis of data $N_i N_i$ & $(A.W.)_i$ given in table-2 showed the increase in mobility of atomic clusters from 4-6 times of minerals during study of an Apple from the first day of observations to the last day.

During study the freshness, softness and texture of an Apple varied strongly (see figure-3) is due to major change in the presence of mineral calcium pectate enzyme. **With ripening** the respiratory activity increases and the breakdown of calcium pectate starts to pectic acid. It does have sugar binding capacity and as a result increases softness in Apple and hence the mineral particles become free. Pectins are the major constituents of prime Pectins and are the major constituents of the primary cell wall & middle lamella, which help to give the texture and quality of an apple. Decomposition of pectin during ripening is responsible for tissue softening in several fruits. Pectins are also major source of dietary fiber in Apple for its medicinal properties. Ethylene gaseous phytohormone plays a central role in ripening of an Apple, it increases gradually to peak then gradually decreases, the fruit then moves into aging stage. (Li et al., 2016). All Apples turn colour before converting all of the yeast starch to sugar so the flavour is still the more important indicator than colour. Apples often change texture as they ripen going from hard to either crisp or mealy. All these could help in enhancing the mobilities of clusters of electric charges in an Apple.

We finally conclude that for the first few days (<4days) when Apple is kept at room temperature is eatable, but after that tightness is lost (Apple becomes soft with deformed texture) with extra rise of NEP (n/k) to 37.6 % and conduction of clusters of minerals increased from 4 to 6 in later stage of Apple. This shows that juice of an Apple is more nutritional for health and Apple can be used till couple of days without harm. Therefore juice producing companies can store Apple for their economic urge in market for couple of days before processing in the juice production at room temperature.

Acknowledgement:

Authors are thankful and express their deep gratitude to Administrators Dr. Vaseem Khan and Dr. Nima Khan, RNT group of College, Kapasan for their generous help and providing research facilities in carrying out this study smoothly in prescribed time frame of teaching of U.G. and P.G. students.

References

- Apples, raw, with skin (Includes foods for USDA's Food Distribution Program), FDC Published, 4/1/2019.
- Aprikian, O., Duclos, V., Guyot, S., Besson, C., Manach, C., Bernalier, A., Morand, C., Rémésy, C., Demigné, C., (2003). Apple pectin and a polyphenol-rich apple concentrate are more effective together than separately on cecal fermentations and plasma lipids in rats. *J. Nutr.* 133 (6), 1860–1865.
- Bengoechea, M. L., Sancho, A. I., & Bartolome, B. (1997). Phenolic composition of industrially manufactured purees and concentrates from peach and apple fruites. *Journal of Agricultural and Food Chemistry*, 45, 4071–4075.
- Boyer, J., Liu, R.H., (2004). Apple phytochemicals and their health benefits. *Nutr. J.* 3 (1). Boynton, D., Oberly, G.H., 1966. In: Childers, N.F. (Ed.), *Temperate to Tropical Fruit Nutrition*. Somerset Press, Somerville, New Jersey, U.S.A 1–50 and 489–503.
- Cannella, C., (2008). *Aspetti nutrizionali. Il melo*. Ed. Script. Bayer Crop Sci., 62–67.
- Dolenc, K., & Stampar, F. (1997). An investigation of the application and conditions of analyses of HPLC methods for determining sugars and organic acids in fruits. *Research reports of Biotechnical Faculty, University of Ljubljana.*, 69, 99–106.
- Drogoudi, P.D., Michailidis, Z., Pantelidis, G., (2008). Peel and flesh antioxidant content and harvest quality characteristics of seven apple cultivars. *Sci. Hortic.—Amsterdam* 115 (2), 149–153.
- Feskanich, D., Ziegler, R.G., Michaud, D.S., Giovannucci, E.L., Speizer, F.E. Willet, W.C., Colditz, G.A., (2000). Prospective Study of Fruit and Vegetable Consumption and Risk of Lung cancer Among Men and Women. *gler, R.G., - Journal of National Cancer Institute, Vol. 92, P: 1812-1823.*
- Fuleki, T., Pelayo, E., & Palabay, R. B. (1994). Sugar composition of varietal juices produced from fresh and stored apples. *Journal of Agricultural and Food Chemistry*, 42, 1266–1275.
- Giri et al., (2019) *Post harvest Management of apple in Nepal. "Reduce Postharvest Losses to Feed More People in Asia"*. ISBN: 978-9937-0-6211-4.
- Karakasova, L., Stefanoski, A., Rafajiovska, V., Klopcevska, J., (2009). Technological Characteristics of Some Apple Cultivars. *Acta Horticulturae* vol: 825, P: 559-564
- Kiczorowska, Bożena, and Piotr Kiczorowski (2005). "Comparison of some chemical components in apples szampion variety produced in the lublin province." *Acta Sci. Pol. Technol. Aliment.* 4.2 37 - 45.
- Knekt, P., Kumpulainen, J., Jarvinen, R. (2002). Flavonoid intake and risk of chronic diseases. *American Journal of Clinical Nut.*, 760, 560- 568.

Kyriacou, M.C., Rouphael, Y., (2018). Towards a new definition of quality for fresh fruits and vegetables. Article In Press, Corrected Proof, Available online 24 October 2017.

Lee, C. Y., & Mattick, L. R. (1989). Composition and nutritive value of apple products. In Processed apple products (pp. 303–322). New York: Van Nostrand Reinhold.

Li, T., Jiang t., Zhang L., Tan D., Wei Y., Yuan H., Wang A. (2016). Apple (*Malus domestica*) MdERF2 negatively affects ethylene biosynthesis during fruit ripening by suppressing *MdACS1* transcription. *Plant journal*, 88: 735-748.

Lurie, S., (2008). Quality parameters of fresh fruit and vegetable at harvest and shelf life. In: Zude, M. (Ed.), *Optical Monitoring of Fresh and Processed Agricultural Crops*. CRC Press, Boca Raton, pp. 2–16.

Masoodi, F. A., and Chauhan, G. S. (2007). Use of apple pomace as a source of dietary fiber in wheat bread. *J. Food Process. Preserv.*, 22: 255-263.

Maxwell, E.G.; Belshaw, N.J.; Waldron, K.W.; Morris, V.J. Pectin (2012)—An Emerging New Bioactive Food Polysaccharide. *Trends Food Sci. Technol.*, 24, 64–73.

Miller, N. J., & Rice-Evans, C. A. (1997). The relative contributions of ascorbic acid and phenolic antioxidants to the total antioxidant activity of orange and apple fruit juices and blackcurrant drink. *Food Chemistry*, 60(3), 331–337.

Munarin, F.; Tanzi, M.C.; Petrini, P. Advances in Biomedical Applications of Pectin Gels (2012). *Int. J. Biol. Macromol.* , 51, 681–689.

Pissard, A., Fernández Pierna, J.A., Baeten, V., Sinnaeve, G., Lognay, G., Mouteau, A., Dupont, P., Rondia, P., Lateur, M., (2013). Non-destructive measurement of vitamin C, total polyphenol and sugar content in apples using near-infrared spectroscopy. *J. Sci. Food Agric.* 93 (2), 238–244.

Rascón-Chu, A.; Díaz-Baca, J.A.; Carvajal-Millán, E.; López-Franco, Y.; Lizardi-Mendoza, J. New Use for an “Old” Polysaccharide: Pectin-Based Composite Materials. In *Handbook of Sustainable Polymers: Structure and Chemistry*; Thakur, V.K., Thakur, M.K., Eds.; Pan Stanford Publishing Pte. Ltd.: Singapore, 2016; pp. 72–107.

Sharma, R.; Ahuja, M.; Kaur, H. Thiolated Pectin Nanoparticles: Preparation, Characterization and ex vivo Corneal Permeation Study. (2012). *Carbohydr. Polym.* , 87, 1606–1610.

Spengler, R.N. (2019). Origins of the apple: The role of megafaunal mutualism in the domestication of *Malus* and rosaceous trees. *Front. Plant Sci.*, 10, 617.

V Prasanna, TN Prabha, RN Tharanathan (2007). Fruit ripening phenomena an overview., *Critical reviews in food science and nutrition*, Taylor & Francis pp 1-9.

Velasco, R., Zharkikh, A., Affourtit, J., Dhingra, A., Cestaro, A., Kalyanaraman, A., Fontana, P., Bhatnagar, S. K., Troggo, M., Pruss, D. and others. (2010). The genome of the domesticated apple (*Malus x domestica* Borkh.). *Nature Genetics*:833-839.

Verma, A. K., Sharma, B. D., and Banerjee, R. (2010). Effect of sodium chloride replacement and apple pulp inclusion on the physicochemical, textural and sensory properties of low fat chicken nuggets. *LWT-Food Sci. Technol.*, 43: 715-719.

Watkins, C. (2003). Apples: Botany, production and uses. In *Principles and Practices of Postharvest Handling and Stress*; CABI Publishing: Wallingford, UK; pp. 585–614.

Wen-chuan Guo , Stuart O. Nelson , Samir Trabelsi , Stanley J. Kays . (2007). 10–1800-MHz dielectric properties of fresh apples during storage. *Journal of food engineering*. Vol 83, 4, 2007. pp 562-569.

Wolf, K.L., Liu, R.H. (2003). Apple peels as a value-added food ingredient. *J. Agric. Food Chem.* 51, 1676-1683.

Zhichao Yang, Menghua Lin, Xiangzheng Yang, Changqing Zhu, Di Wu, Kunsong Chen. (2023), Mechanism of the response of apple fruit to postharvest compression damage analysed by integrated transcriptome and metabolome, *Food Chemistry* .Vol:20, 100972